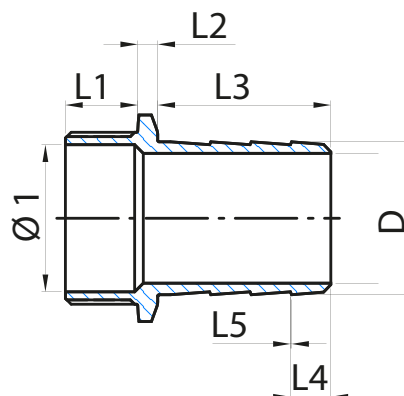


Fig. 315

EDELSTAHL - GEWINDEFITTING, SCHLAUCHTÜLLE AG
THREADED STAINLESS STEEL FITTING - HOSE NIPPLE


ISO 4144


TECHNISCHE INFORMATIONEN - TECHNICAL INFORMATION

DN	ART-NR. COD.	ABMESSUNGEN - DIMENSIONS							Stückgewicht, ca. Weight aprox. (kg)
		Ø 1 (mm)	D (mm)	L1 (mm)	L2 (mm)	L3 (mm)	L4 (mm)	L5 (mm)	
1/8" x 8 mm.	I3156000	5,5	8,0	8,0	4,0	26	6,0	0,4	0,015
1/4" x 9 mm.	I3156001	8,0	9,0	10,5	4,0	28	6,5	0,4	0,020
3/8" x 11 mm.	I3156002	11,5	11,5	11,0	5,0	33	7,5	0,4	0,040
1/2" x 15 mm.	I3156003	15,0	15,0	14,5	5,0	38	8,5	0,4	0,045
3/4" x 20 mm.	I3156004	20,5	20,0	15,5	5,5	45	10,5	0,4	0,075
1" x 27 mm.	I3156005	26,0	27,0	18,0	6,0	52	12,0	0,4	0,120
1 1/4" x 33 mm.	I3156006	34,5	33,0	20,5	6,5	52	12,0	0,4	0,170
1 1/2" x 40 mm.	I3156007	40,0	39,5	20,5	6,5	56	13,0	0,4	0,285
2" x 53 mm.	I3156008	51,0	52,0	25,0	7,0	60	14,0	0,4	0,435
2 1/2" x 66 mm.	I3156009	65,5	67,0	27,0	7,0	65	14,0	0,4	0,625
3" x 80 mm.	I315600A	77,5	80,0	30,0	7,5	70	15,0	0,4	0,915
4" x 105 mm.	I315600C	102,0	105,0	36,0	8,0	73	15,0	0,4	1,385

ALLGEMEINE EIGENSCHAFTEN

- Hergestellt aus austenitischem Edelstahl AISI 316 (1.4401) mit genormter Wärmebehandlung.
- Herstellungsmethode: Guss.
- Baulängen gem. Norm ISO 4144.
- Gewinde gem. DIN EN 10226-1/ ISO 7-1 (Typ R-Rp).
- Betriebstemperatur: -20 bis 220 °C.
- Betriebsdruck, max. : PN 20.

ALLGEMEINE EIGENSCHAFTEN

- Wasser, Luft, Dampf, Öle und div. Gase.

Hinweis:

Aufgrund der Komplexität, Art und Vielfalt von Installationen und der damit einhergehenden externen Faktoren welche die Betriebsbedingungen des Produktes beeinflussen können, liegt es in der Verantwortung des Installateurs die korrekte Funktion der Installation vor Inbetriebnahme zu testen.

Die Installation ist stets nach den allgemein gültigen Regeln der Technik zu errichten und instand zu halten.

Bemerkung : Aufgrund der laufenden Weiterentwicklung unserer Produkte können sich bestimmte Angaben ohne vorherigen Hinweis ändern.

Note : Due to the continuous development of our products, specifications may be changed without notification at any time.

BASIC FEATURES

- Made of austenitic stainless steel AISI 316 with standard heat treatment.
- Production method: Fusion.
- Dimensions according to ISO 4144 standard.
- Threads according to EN 10226-1/ ISO 7-1 (type R-Rp).
- Working temperature range: -20 to 220 °C.
- Maximal working pressure: PN 20.

GENERAL APPLICATIONS

- Water, air, steam, oil and gas.

Remarks:

Due to the complexity, variety and large number of particular specifications for each installation, along with the existence of diverse factors which can affect the working conditions and nature of the product, it is the responsibility of the end-user to carry out the necessary tests to ensure the proper functioning of the product in any specific application.

Product installation must be carried out and maintained following the good practice codes and/or updated technical standards.



Polígono Industrial ATUSA - Agurain S/N - 01200 Salvatierra (Alava) España
 Tel.: (+34) 945 18 00 00 Fax : (+34) 945 30 01 53 e-mail: ventas@atusagroup.com
www.atusagroup.com

Rev.2-11.20