


TUERCA ROSCADA DIN 11851

DIN 11851 THREADED NUT

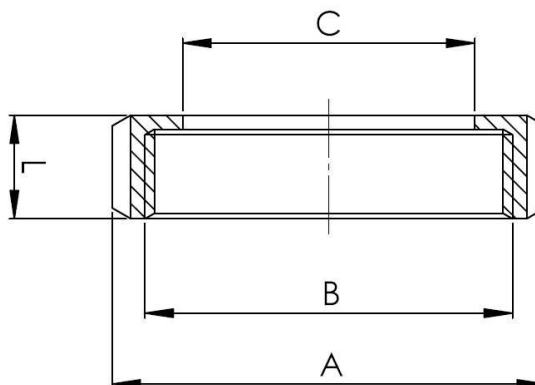

CARACTERÍSTICAS BÁSICAS

- Material acero inoxidable AISI 304.
- Según norma DIN 11851.
- Acabado: Pulido.
- Rosca de acuerdo a DIN 405.

BASIC FEATURES

- Stainless Steel AISI 304.
- According to DIN 11851 standard.
- Ending: Polish.
- Thread according to DIN 405 standard.

INFORMACIÓN TÉCNICA - TECHNICAL INFORMATION

DN	COD.	DIMENSIONES - DIMENSIONS					Peso aprox. Weight aprox. (g)
		A (mm)	B (mm)	C (mm)	Ranuras - Slots	L (mm)	
15	I3744003	44	34	21	4	18	82
20	I3744004	54	44	31	4	20	128
25	I3744005	63	52	36	4	21	180
32	I3744006	70	58	42	4	21	209
40	I3744007	78	65	49	4	21	253
50	I3744008	92	78	62	4	22	346
65	I3744009	112	95	80	6	25	551
80	I374400A	127	110	94	6	29	796
100	I374400C	148	130	115	6	31	1.047
125	I374400D	178	160	138	6	35	1.440
150	I374400E	210	190	164	6	40	2.250

Observaciones:

Dada la complejidad, variedad y gran cantidad de especificaciones particulares de cada instalación, en conjunción con la existencia de diversos factores que pueden afectar a las condiciones de trabajo y naturaleza del producto, es responsabilidad del usuario final realizar los ensayos necesarios para garantizar el correcto funcionamiento del producto en cada aplicación concreta.
La instalación del producto deberá realizarse y mantenerse siguiendo códigos de buena práctica y/o estándares existentes.

Remarks:

Due to the complexity, variety and large number of particular specifications for each installation, along with the existence of diverse factors which can affect the working conditions and nature of the product, it is the responsibility of the end-user to carry out the necessary tests to ensure the proper functioning of the product in any specific application.
Product installation must be carried out and maintained following the good practice codes and/or updated technical standards.

Nota : Debido al constante desarrollo de nuestros productos, los datos suministrados pueden ser alterados sin previo aviso.

Note : Due to the continuous development of our products, specifications may be changed without notification at any time.

Rev.1-05.20



Polígono Industrial ATUSA - Agurain S/N - 01200 Salvatierra (Alava) España
Tel.: (+34) 945 18 00 00 Fax : (+34) 945 30 01 53 e-mail: ventas@atusagroup.com
www.atusagroup.com