




SISTEMA ANTI-HIELO
ANTI-ICE SYSTEM

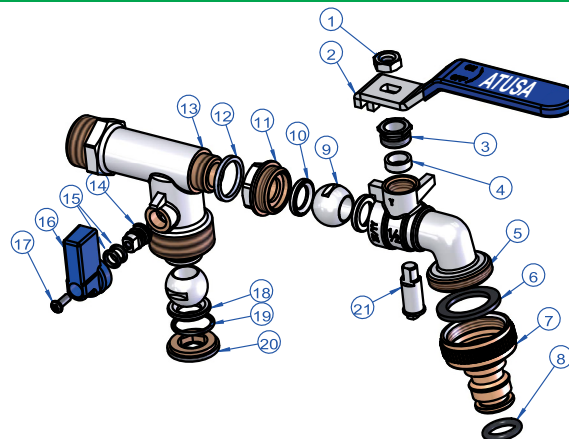

DESCRIPCIÓN COMPONENTES - COMPONENTS DESCRIPTION

Ítem	Descripción - Description	Material - Material	Acabado - Surface
1	Tuerca - Nut	Acero - Steel	Niquelado - Nickel plated
2	Maneta - Handle	Acero - Steel	Niquelado - Nickel plated
3	Tuerca prensado - Stem nut	Latón - Brass	Niquelado - Nickel plated
4	Anillo prensado - Stem packing	PTFE	---
5	Cuerpo - Body	Latón - Brass CW617N	Niquelado - Nickel plated
6	Junta - Joint	NBR	---
7	Conexión manguera - Hose connection	Latón - Brass	Niquelado - Nickel plated
8	Junta tórica - O-Ring	NBR	---
9	Bola - Ball	Latón - Brass	Cromado - Chromed plated
10	Asiento - Ball seats	PTFE	---
11	Tuerca - Nut	Latón - Brass CW617N	Niquelado - Nickel plated
12	Arandela - Washer	PTFE	---
13	Contra cuerpo - Cap	Latón - Brass CW617N	Niquelado - Nickel plated
14	Eje - Stem	Latón - Brass	Niquelado - Nickel plated
15	Junta tórica - O-Ring	NBR	---
16	Maneta - Handle	Aluminio - Aluminium	Pintado - Painted
17	Tornillo - Screw	Acero - Steel	Niquelado - Nickel plated
18	Asiento - Seat	PTFE	---
19	Junta tórica - O-Ring	NBR	---
20	Tuerca - Nut	Latón - Brass	---
21	Eje - Stem	Latón - Brass	Niquelado - Nickel plated

CARACTERÍSTICAS BÁSICAS

- Fabricada en latón CW617N según UNE-EN 12165.
- Presión máxima de ejercicio: PN 16.
- Temperatura de servicio: -10 °C a 90 °C.
- Extremo rosca macho según UNE-EN ISO 228-1.
- Prensa estopa con guarnición de PTFE.
- Maneta de acero plastificada en color azul.
- Salida racor rápido conexión manguera.
- Sistema anti-hielo.
- Válvula de cierre rápido, todo o nada, 1/4 de vuelta.

APLICACIONES GENERALES

- Apta para agua fría e agua caliente.
- Instalaciones de fontanería.
- Conducciones de agua para riego.

BASIC FEATURES

- Produced in brass CW617N according to EN 12165.
- Maximum working pressure: PN 16.
- Working temperature: -10 °C to 90 °C.
- Male thread end according to EN ISO 228-1.
- Packing gland in the stem with PTFE gasket.
- Steel handle with blue plastic cover.
- Fitting with quick connector.
- Anti-ice system.
- Quick closing valve, quarter turn for on/off service.

GENERAL APPLICATIONS

- Suitable for cold and hot water.
- Plumbing installations.
- Irrigation systems.

Rev.1-03.24
1/2



Polígono Industrial ATUSA - Agurain S/N - 01200 Salvatierra (Alava) España
Tel.: (+34) 945 18 00 00 Fax : (+34) 945 30 01 53 e-mail: ventas@atusagroup.com
www.atusagroup.com



DIAGRAMA PRESIÓN - TEMPERATURA / PRESSURE - TEMPERATURE DIAGRAM

