


MACHO SOLDAR SMS SMS WELDING MALE

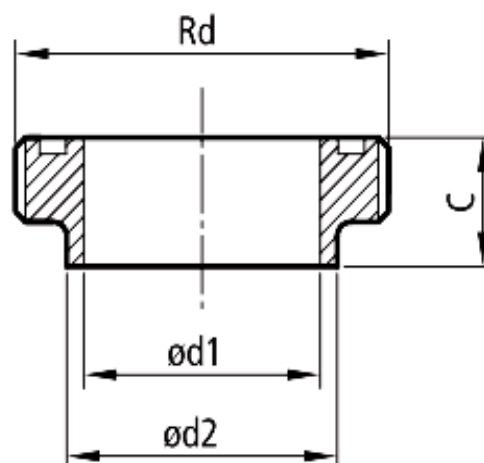

CARACTERÍSTICAS BÁSICAS

- Fabricados en acero inoxidable AISI 316L.
- Según norma SMS 1146.
- Acabado: Pulido.
- Rosca de acuerdo a DIN 405.
- Terminación superficie interna $Ra \leq 0,8 \mu m$.

BASIC FEATURES

- Made of stainless steel AISI 316L.
- According to SMS 1146 standard.
- Ending: Polish.
- Thread according to DIN 405 standard.
- Internal surface finished $Ra \leq 0,8 \mu m$.

INFORMACIÓN TÉCNICA - TECHNICAL INFORMATION

DN	COD.	DIMENSIONES - DIMENSIONS				Peso aprox. Weight aprox. (kg)
		Ød1 (mm)	Ød2 (mm)	Rd	C (mm)	
25	I3806S05	22,5	25,0	Rd40x1/6"	19	0,070
38	I3806S06	35,5	38,0	Rd60x1/6"	23	0,175
51	I3806S07	48,5	51,0	Rd70x1/6"	23	0,190
63,5	I3806S08	60,5	63,5	Rd85x1/6"	27	0,350
76	I3806S09	72,9	76,1	Rd98x1/6"	27	0,430
101,6	I3806S0A	97,6	101,6	Rd132x1/6"	27	0,550
104	I3806S0C	100,0	104,0	Rd125x1/4"	30	0,570

Observaciones:

Dada la complejidad, variedad y gran cantidad de especificaciones particulares de cada instalación, en conjunción con la existencia de diversos factores que pueden afectar a las condiciones de trabajo y naturaleza del producto, es responsabilidad del usuario final realizar los ensayos necesarios para garantizar el correcto funcionamiento del producto en cada aplicación concreta.

La instalación del producto deberá realizarse y mantenerse siguiendo códigos de buena práctica y/o estándares existentes.

Remarks:

Due to the complexity, variety and large number of particular specifications for each installation, along with the existence of diverse factors which can affect the working conditions and nature of the product, it is the responsibility of the end-user to carry out the necessary tests to ensure the proper functioning of the product in any specific application.

Product installation must be carried out and maintained following the good practice codes and/or updated technical standards.

Nota : Debido al constante desarrollo de nuestros productos, los datos suministrados pueden ser alterados sin previo aviso.

Note : Due to the continuous development of our products, specifications may be changed without notification at any time.

Rev.0-12.22



Polígono Industrial ATUSA - Agurain S/N - 01200 Salvatierra (Alava) España
Tel.: (+34) 945 18 00 00 Fax : (+34) 945 30 01 53 e-mail: ventas@atusagroup.com
www.atusagroup.com