

DESCRIPTION DES COMPOSANTS - COMPONENTS DESCRIPTION

Index - Ítem	Description - Descripción	Matière - Material
1	Corps - Body	Laiton - Brass CW617N
2	Chapeau - Bonnet	Laiton - Brass CW617N
3	Opercule - Gate	Laiton - Brass CW617N
4	Axe - Stem	Laiton - Brass CW614N
5	Écrou - Packing nut	Laiton - Brass CW614N
6	Bague - Lock nut	Laiton - Brass CW614N
7	Bague de l'axe - Stem ring	Laiton - Brass CW614N
8	Joint - Gasket	Fibre
9	Bague du fouloir - Packing ring	PTFE
10	Joint torique	NBR
11	Volant - Handle	Acier - Steel
12	Rondelle - Washer	Aluminium - Aluminium
13	Écrou - Nut	Acier - Steel

CARACTERISTIQUES

- Vanne opercule F/F.
- Corps, chapeau et opercule en laiton selon NF EN 12165.
- Pression maximale de service: PN 16.
- Température de service: -10 °C à 80 °C.
- Extrémités taraudées selon norme NF EN ISO 228-1.
- Attestation de conformité sanitaire A.C.S. N° 14 ACC NY 356.
- Montage horizontal, vertical ou oblique.
- Test de pression individuel.
- Bidirectionnel.

DOMAINES D'APPLICATION


- Convient pour eau froide et eau chaude.
- Systèmes d'adduction d'eau.
- Systèmes d'irrigations.
- Climatisation.

BASIC FEATURES

- Gate valve F/F.
- Brass body, bonnet and gate according to EN 12165.
- Maximum working pressure: PN 16.
- Working temperature: -10 °C to 80 °C.
- Female thread ends according to EN ISO 228-1.
- Certificate of sanitary conformity A.C.S. N° 14 ACC NY 356.
- It can work in horizontal, vertical or oblique position.
- Unit pressure test.
- Bidirectional design.

GENERAL APPLICATIONS

- Suitable for cold and hot water.
- Water systems.
- Irrigation systems.
- HVAC systems.

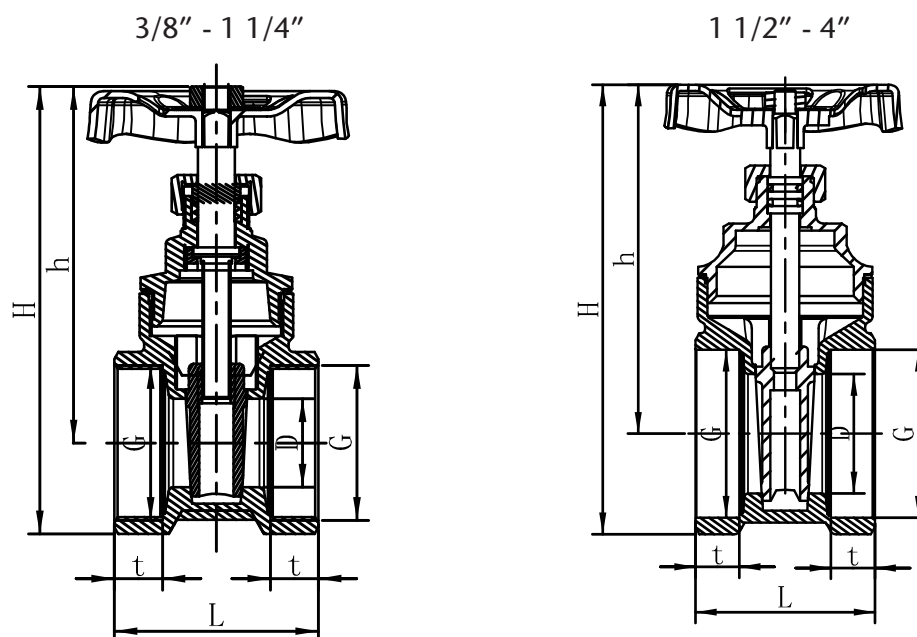

INFORMATION TECHNIQUE - TECHNICAL INFORMATION

G (pouces)	COD.	PN	DIMENSIONS - DIMENSIONS					Poids approx. Weight approx. (g)
			D (mm)	L (mm)	H (mm)	h (mm)	t (mm)	
3/8"	VS150002	16	13	38	79	66	10	196
1/2"	VS150003	16	13	38	79	66	10	180
3/4"	VS150004	16	15	41	84	67	11	206
1"	VS150005	16	19	45	96	77	11	288
1 1/4"	VS150006	16	26	51	116	91	13	445
1 1/2"	VS150007	16	33	51	124	96	14	565
2"	VS150008	16	42	61	156	119	16	970
2 1/2"	VS15000A	16	60	66	204	159	17	1.740
3"	VS15000B	16	68	84	237	185	23	2.465
4"	VS15000C	16	93	81	295	227	19	4.305

Remarques:

Étant donné la complexité, la variété et le grand nombre de spécifications particulières de chaque installation, conjugués à l'existence de divers facteurs pouvant affecter les conditions de travail et la nature du produit, il incombe à l'utilisateur final d'effectuer les tests nécessaires pour assurer un bon fonctionnement du produit dans chaque domaine d'application.

L'installation du produit doit être effectuée et entretenue conformément aux bonnes pratiques et aux normes en vigueur.

Remarks:

Due to the complexity, variety and large number of particular specifications for each installation, along with the existence of diverse factors which can affect the working conditions and nature of the product, it is the responsibility of the end-user to carry out the necessary tests to ensure the proper functioning of the product in any specific application.

Product installation must be carried out and maintained following the good practice codes and/or updated technical standards.

Note : En raison de l'évolution constante de nos produits, ces spécifications peuvent être modifiées sans préavis.

Note : Due to the continuous development of our products, specifications may be changed without notification at any time.

Rev.2-01.22

2/2