


# DOUILLE À DUDGEONNER EXPANDING LINER

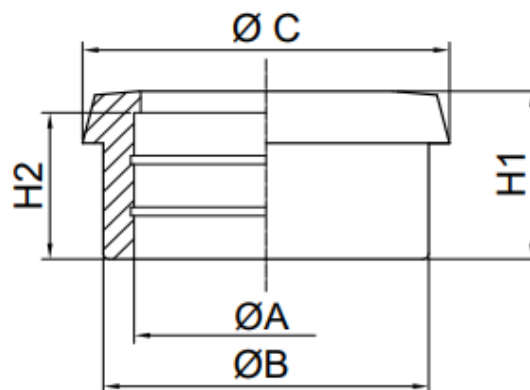

## CARACTÉRISTIQUES

- Fabriqué en acier Inoxydable AISI 316L.
- Finition: Polis.
- Finition de la surface intérieure  $Ra \leq 0,8 \mu m$ .

## BASIC FEATURES

- Made of stainless steel AISI 316L.
- Ending: Polish.
- Internal surface finished  $Ra \leq 0,8 \mu m$ .

## INFORMATIONS TECHNIQUES - TECHNICAL INFORMATION

| DN  | COD.     | DIMENSIONS - DIMENSIONS |           |           |            |            | Poids approx.<br>Weight aprox.<br>(kg) |
|-----|----------|-------------------------|-----------|-----------|------------|------------|----------------------------------------|
|     |          | A<br>(mm)               | B<br>(mm) | C<br>(mm) | H1<br>(mm) | H2<br>(mm) |                                        |
| 10  | I3816M02 | 12,2                    | 18        | 22,5      | 17         | 12         | 0,024                                  |
| 15  | I3816M03 | 18,2                    | 24        | 28,5      | 17         | 12         | 0,034                                  |
| 20  | I3816M04 | 22,2                    | 30        | 36,5      | 18         | 12         | 0,062                                  |
| 25  | I3816M05 | 28,2                    | 35        | 44        | 22         | 15         | 0,120                                  |
| 32  | I3816M06 | 34,2                    | 41        | 50        | 25         | 18         | 0,168                                  |
| 40  | I3816M07 | 40,2                    | 48        | 56        | 26         | 20         | 0,148                                  |
| 50  | I3816M08 | 52,2                    | 61        | 68,5      | 28         | 22         | 0,215                                  |
| 65  | I3816M09 | 70,3                    | 79        | 86        | 32         | 25         | 0,322                                  |
| 80  | I3816M0A | 85,3                    | 93        | 100       | 37         | 28         | 0,399                                  |
| 100 | I3816M0C | 104,3                   | 114       | 121       | 44         | 35         | 0,684                                  |

### Remarques:

Étant donné la complexité, la variété et le grand nombre de spécifications particulières de chaque installation, conjugués à l'existence de divers facteurs pouvant affecter les conditions de travail et la nature du produit, il incombe à l'utilisateur final d'effectuer les tests nécessaires pour assurer un bon fonctionnement du produit dans chaque domaine d'application.  
L'installation du produit doit être effectuée et entretenue conformément aux bonnes pratiques et aux normes en vigueur.

### Remarks:

Due to the complexity, variety and large number of particular specifications for each installation, along with the existence of diverse factors which can affect the working conditions and nature of the product, it is the responsibility of the end-user to carry out the necessary tests to ensure the proper functioning of the product in any specific application.  
Product installation must be carried out and maintained following the good practice codes and/or updated technical standards.

Note : En raison de l'évolution constante de nos produits, ces spécifications peuvent être modifiées sans préavis.

Note : Due to the continuous development of our products, specifications may be changed without notification at any time.

Rev.0-05.23



Polígono Industrial ATUSA - Agurain S/N - 01200 Salvatierra (Alava) España  
Tel.: (+34) 945 18 00 00 Fax : (+34) 945 30 01 53 e-mail: [ventas@atusagroup.com](mailto:ventas@atusagroup.com)  
[www.atusagroup.com](http://www.atusagroup.com)