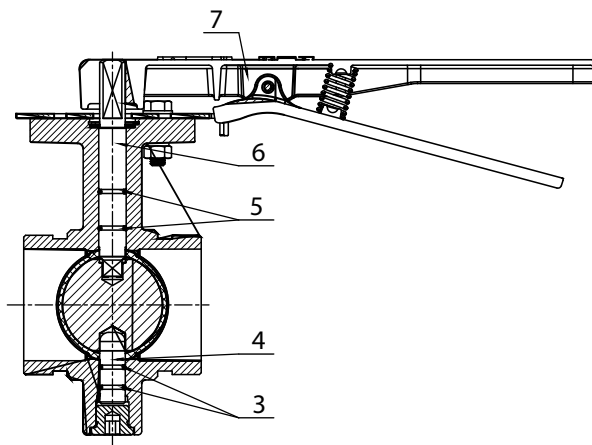
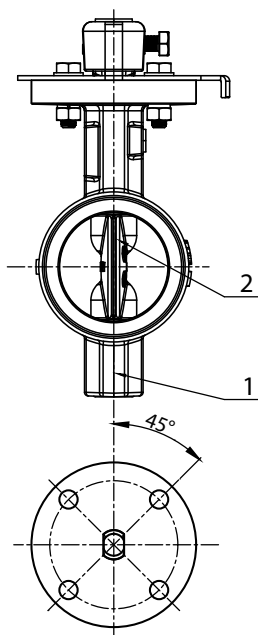



DESCRIPTION DES COMPOSANTS - COMPONENTS DESCRIPTION

Index	Description - Description	Matière - Material
1	Corps - Body	Fonte Ductile - Ductile Iron (EN-GJS-450-10)
2	Disque - Disc	Fonte Ductile + EPDM - Ductile Iron + EPDM (EN-GJS-450-10)
3	O-Ring	NBR
4	Axe - Stem	Acier Inoxydable - Stainless Steel UNS S43100 (SS431)
5	O-Ring	NBR
6	Axe - Stem	Acier Inoxydable - Stainless Steel UNS S43100 (SS431)
7	Manette - Lever	Fundición Dúctil - Ductile Iron (EN-GJS-450-10)

CARACTÉRISTIQUES DE BASE

- Fabrication selon MSS SP-67.
- Rainuré selon ISO 6182.
- Bride de montage actionneur : ISO 5211.
- Pression de service (maxi) : PN 16 / 230 PSI / 1,6 MPa.
- Température de service : de 0 à 80 °C.
- Finition rouge : recouvert Epoxy selon ANSI-AWWA C550.

DOMAINES D'APPLICATION

- Services des eaux, irrigation, réseaux anti-incendie.

Remarques:

Étant donné la complexité, la variété et le grand nombre de spécifications particulières de chaque installation, conjugués à l'existence de divers facteurs pouvant affecter les conditions de travail et la nature du produit, il incombe à l'utilisateur final d'effectuer les tests nécessaires pour assurer un bon fonctionnement du produit dans chaque domaine d'application.

L'installation du produit doit être effectuée et entretenue conformément aux bonnes pratiques et aux normes en vigueur.

BASIC FEATURES

- Product according to s/ MSS SP-67.
- Grooves ISO 6182.
- Top flange: ISO 5211.
- Service pressure (max.): PN 16 / 230 PSI / 1,6 MPa.
- Service Temperature: 0 - 80 °C.
- Finished red: fusion bonded epoxy coating ANSI-AWWA C550.


GENERAL APPLICATIONS

- Supply and sanitary water services, irrigation, fire fighting systems.

Remarks:

Due to the complexity, variety and large number of particular specifications for each installation, along with the existence of diverse factors which can affect the working conditions and nature of the product, it is the responsibility of the end-user to carry out the necessary tests to ensure the proper functioning of the product in any specific application.

Product installation must be carried out and maintained following the good practice codes and/or updated technical standards.

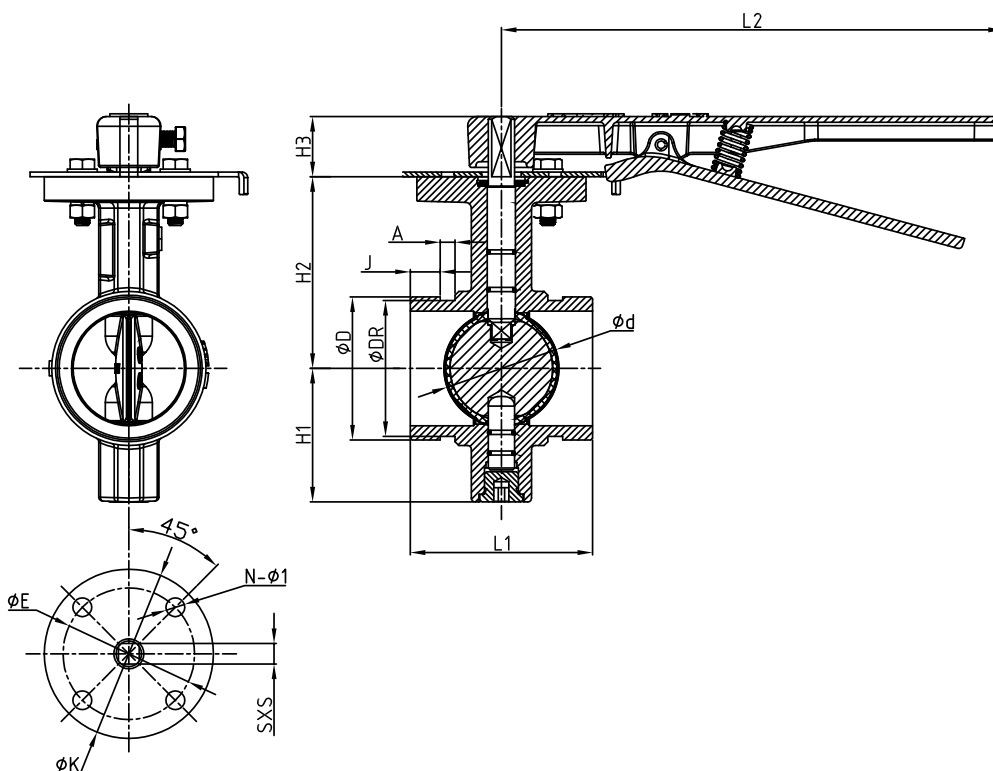
INFORMATIONS TECHNIQUES - TECHNICAL INFORMATION

Tube acier Steel Pipe			COD.	DIMENSIONS (mm) - DIMENSIONS (mm)													Poids approx. Weight aprox. (kg)
DN	Inch.	ØD (mm)		Ød	ØDR	J	A	H1	H2	H3	L1	L2	E-K	N-Ø1	ISO 5211	SxS	
50	2"	60,3	6V620208	50,3	57,15	15,88	7,92	65	89	32	81	267	70-90	4-Ø10	F07	9x9	2,755
65	2 1/2"	76,1	6V62020B	60,8	72,26	15,88	7,92	71	102	32	97	267	70-90	4-Ø10	F07	9x9	3,455
80	3"	88,9	6V62020A	76,0	84,94	15,88	7,92	81	109	32	97	267	70-90	4-Ø10	F07	9x9	3,940
100	4"	114,3	6V62020C	98,5	110,08	15,88	9,52	95	128	32	116	267	70-90	4-Ø10	F07	11x11	5,345
125	5"	139,7	6V62020H	122,6	135,48	15,88	9,52	111	141	32	148	267	70-90	4-Ø10	F07	14x14	8,305
150	6"	168,3	6V62020E	148,0	163,96	15,88	9,52	133	153	32	148	267	70-90	4-Ø10	F07	14x14	11,595
200	8"	219,1	6V62020M	199,0	214,40	19,05	11,13	164	184	45	133	356	102-125	4-Ø12	F10	17x17	17,360

AVIS Important : ne jamais retirer ou modifier des éléments de la tuyauterie sans avoir au préalable dépressurisé et vidangé entièrement l'installation. Ne pas le faire pourrait entraîner de graves dommages corporels et/ou économiques.

Important NOTICE : never remove or modify any piping component without first de-pressurizing and draining completely the installation. Failure to do it could result in serious personal injury and/or economical losses.

Note : En raison de l'évolution constante de nos produits, ces spécifications peuvent être modifiées sans préavis.

Note : Due to the continuous development of our products, the design and information given, may be changed without notification at any time.

Rev.2-12.25
2/2