


FLANGIA LIBERA PIANA FORGIATA PER TUBI PVC - PN 10/16 FORGED LOOSE PLATE FLANGE FOR PVC TUBE - PN 10/16



PN 10/16

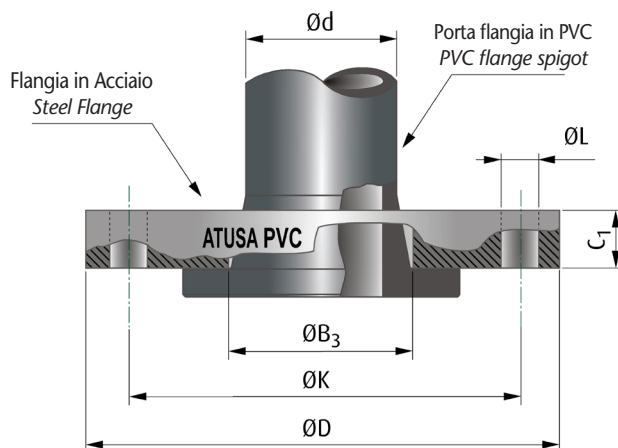

INFORMAZIONI TECNICHE - TECHNICAL INFORMATION

Designazione - Designation			Flange - Flange						Viti - Bolting		Peso appros. Weight aprox. (kg)
COD.	Tubi PVC PVC tube		PN	Diametro esterno Outside diameter	Diametro del cerchio di viti Diameter of bolt circle	Diametro foro per viti Diameter of bolt hole	Diametro interno Bore diameter	Spessore Thickness	Numero Number	Diametro Diameter	
	DN	$\varnothing d$ (mm)		$\varnothing D$ (mm)	$\varnothing K$ (mm)	$\varnothing L$ (mm)	$\varnothing B_3$ (mm)	C_1 (mm)	nr (n°)	$\varnothing$ (mm)	
FPVC0050	50	50	10	165 ± 2,0	125 ± 1,0	18 +1,0/0	63 ± 0,5/0	12 +1,0/-1,3	4	M16	1,63
FPVC0063	65	63	10	185 ± 2,0	145 ± 1,0	18 +1,0/0	78 ± 0,5/0	12 +1,0/-1,3	4	M16	1,99
FPVC0075	65	75	10	185 ± 2,0	145 ± 1,0	18 +1,0/0	92 ± 0,5/0	12 +1,0/-1,3	4	M16	1,81
FPVC0090	80	90	16	200 ± 2,0	160 ± 1,0	18 +1,0/0	110 ± 0,5/0	12 +1,0/-1,3	8	M16	1,88
FPVC0110	100	110	16	220 ± 2,0	180 ± 1,0	18 +1,0/0	133 ± 0,5/0	12 +1,0/-1,3	8	M16	2,09
FPVC0125	125	125	16	250 ± 2,0	210 ± 1,0	18 +1,0/0	149 +1,0/0	12 +1,0/-1,3	8	M16	2,80
FPVC0140	125	140	16	250 ± 2,0	210 ± 1,0	18 +1,0/0	167 +1,0/0	12 +1,0/-1,3	8	M16	2,37
FPVC0160	150	160	16	285 ± 2,0	240 ± 1,0	22 +1,0/0	190 +1,0/0	12 +1,0/-1,3	8	M20	3,06
FPVC0200	200	200	10	340 ± 3,0	295 ± 1,0	22 +1,0/0	232 +1,0/0	14 +1,0/-1,3	8	M20	5,01
FPVC6200	200	200	16	340 ± 3,0	295 ± 1,0	22 +1,0/0	232 +1,0/0	14 +1,0/-1,3	12	M20	4,84
FPVC0250	250	250	10	395 ± 3,0	350 ± 1,0	22 +1,0/0	285 +1,0/0	14 +1,0/-1,3	12	M20	5,97
FPVC6250	250	250	16	405 ± 3,0	355 ± 1,0	26 +1,0/0	285 +1,0/0	14 +1,0/-1,3	12	M24	6,46
FPVC0315	300	315	10	445 ± 3,0	400 ± 1,0	22 +1,0/0	345 +1,0/0	14 +1,0/-1,3	12	M20	6,33
FPVC6315	300	315	16	460 ± 3,0	410 ± 1,0	26 +1,0/0	345 +1,0/0	14 +1,0/-1,3	12	M24	7,31

CARATTERISTICHE FONDAMENTALI

- Materiale: Acciaio S235JR secondo la norma UNI EN 10025-2 (RSt 37.2).
- Finitura: zincata.
- Tutte le installazioni devono rispettare i valori P-T secondo i requisiti legali specificati.
- Marcatura: ATUSA; PVC; DN/ $\varnothing d$; MATERIALE; PN; N° DI FUSIONE.

APPLICAZIONI GENERALI

- Impianti idrici.
- Impianti di approvvigionamento idrico, pompaggio e allacciamento.

Osservazioni:

Data la complessità, la varietà e l'elevato numero di specifiche particolari di ciascuna installazione, unitamente all'esistenza di vari fattori che possono influenzare le condizioni di lavoro e la natura del prodotto, è responsabilità dell'utente finale eseguire le prove necessarie per garantire il corretto funzionamento del prodotto in ogni specifica applicazione. L'installazione del prodotto deve essere eseguita e mantenuta secondo codici di buona pratica e/o norme vigenti.

BASIC FEATURES

- Material: Steel S235JR according to EN 10025-2 (RSt 37.2).
- Finished: zincated.
- All installations has to meet the P-T values specified in the legal requirements.
- Marking: ATUSA; PVC; DN/ $\varnothing d$; MATERIAL; PN; HEAT Number.

GENERAL APPLICATIONS

- Water systems.
- Water supply, pumping and connection plants.

Remarks:

Due to the complexity, variety and large number of particular specifications for each installation, along with the existence of diverse factors which can affect the working conditions and nature of the product, it is the responsibility of the end-user to carry out the necessary tests to ensure the proper functioning of the product in any specific application.

Product installation must be carried out and maintained following the good practice codes and/or updated technical standards.

Nota: A causa del costante sviluppo dei nostri prodotti, i dati forniti possono essere modificati senza preavviso.

Note : Due to the continuous development of our products, specifications may be changed without notification at any time.

Rev.2-01.23



Polígono Industrial ATUSA - Agurain S/N - 01200 Salvatierra (Alava) España
Tel.: (+34) 945 18 00 00 Fax : (+34) 945 30 01 53 e-mail: ventas@atusagroup.com
www.atusagroup.com