


Fig. 130R

RACCORDI FILETTATI IN ACCIAIO INOX - TI RIDOTTO

THREADED STAINLESS STEEL FITTING - REDUCING TEE



PN 10

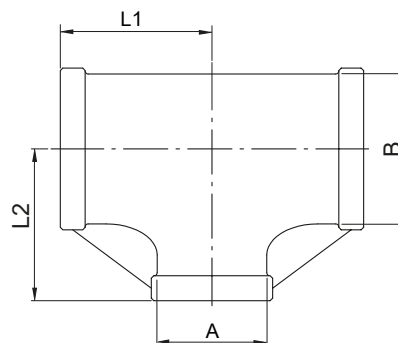

INFORMAZIONI TECNICHE - TECHNICAL INFORMATION

DN	COD.	DIMENSIONI - DIMENSIONS				Peso appros. Weight aprox. (kg)
		L1 (mm)	L2 (mm)	A (mm)	B (mm)	
3/4" x 1/2" x 3/4"	I130L434	25	28	26,0	30,0	0,099
1" x 1/2" x 1"	I130L535	26	28,5	26,0	36,0	0,100
1" x 3/4" x 1"	I130L545	29	31	31,5	38,0	0,151
1 1/4" x 3/4" x 1 1/4"	I130L636	30,5	35,5	31,0	45,0	0,164
1 1/4" x 1" x 1 1/4"	I130L646	35	37	39,0	45,0	0,162
1 1/2" x 1" x 1 1/2"	I130L656	31,5	37,5	39,0	51,0	0,195
1 1/2" x 1 1/4" x 1 1/2"	I130L757	37,5	41	47,0	52,0	0,231
2" x 1 1/4" x 2"	I130L767	46	44,5	53,5	63,0	0,284
2" x 1 1/2" x 2"	I130L858	46	47,5	53,5	63,0	0,333

CARATTERISTICHE FONDAMENTALI

- Realizzato in acciaio inossidabile austenitico AISI 316 con trattamento termico standard.
- Metodo di produzione: Fusione.
- Filettature conformi la norma UNI EN 10226-1 / ISO 7-1 (tipo R-Rp).
- Temperatura di esercizio: da -20 a 220 °C.
- Pressione di esercizio: PN 10.

APPLICAZIONI GENERALI

- Acqua, aria, vapore, oli e gas.

Osservazioni:

Data la complessità, la varietà e l'elevato numero di specifiche particolari di ciascuna installazione, unitamente all'esistenza di vari fattori che possono influenzare le condizioni di lavoro e la natura del prodotto, è responsabilità dell'utente finale eseguire le prove necessarie per garantire il corretto funzionamento del prodotto in ogni specifica applicazione.

L'installazione del prodotto deve essere eseguita e mantenuta secondo codici di buona pratica e/o norme vigenti.

BASIC FEATURES

- Made of austenitic stainless steel AISI 316 with standard heat treatment.
- Production method: Fusion.
- Threads according to EN 10226-1 / ISO 7-1 (type R-Rp).
- Working temperature range: -20 to 220 °C.
- Maximal working pressure: PN 10.

GENERAL APPLICATIONS

- Water, air, steam, oil and gas.

Remarks:

Due to the complexity, variety and large number of particular specifications for each installation, along with the existence of diverse factors which can affect the working conditions and nature of the product, it is the responsibility of the end-user to carry out the necessary tests to ensure the proper functioning of the product in any specific application.

Product installation must be carried out and maintained following the good practice codes and/or updated technical standards.

Nota: A causa del costante sviluppo dei nostri prodotti, i dati forniti possono essere modificati senza preavviso.

Note : Due to the continuous development of our products, specifications may be changed without notification at any time.

Rev.1-07.23



Polígono Industrial ATUSA - Agurain S/N - 01200 Salvatierra (Alava) España
Tel.: (+34) 945 18 00 00 Fax : (+34) 945 30 01 53 e-mail: ventas@atusagroup.com
www.atusagroup.com