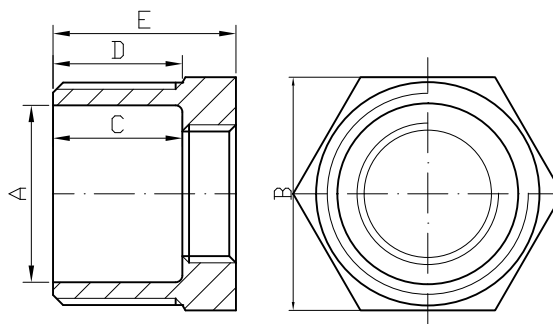


Fig. 241

RACCORDI FILETTATI IN ACCIAIO INOX - NIPPOLO RIDUZIONE
THREADED STAINLESS STEEL FITTING - REDUCING BUSH


ISO 4144


INFORMAZIONI TECNICHE - TECHNICAL INFORMATION

DN	COD.	DIMENSIONI - DIMENSIONS					Peso appros. Weight aprox. (kg)
		A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	
1/4" x 1/8"	I2416010	8,4	15,0	12,0	12,5	19,0	0,010
3/8" x 1/8"	I2416020	11,0	19,0	13,0	14,0	20,3	0,025
3/8" x 1/4"	I2416021	11,0	19,0	13,0	14,0	20,3	0,020
1/2" x 1/4"	I2416031	15,0	22,5	15,0	17,0	23,7	0,035
1/2" x 3/8"	I2416032	15,0	22,5	14,0	17,0	23,7	0,030
3/4" x 1/4"	I2416041	20,5	29,0	16,4	18,0	26,0	0,065
3/4" x 3/8"	I2416042	20,5	29,0	16,3	18,0	26,0	0,060
3/4" x 1/2"	I2416043	20,5	29,0	15,8	18,0	26,0	0,050
1" x 1/2"	I2416053	26,0	35,5	17,4	19,0	27,0	0,085
1" x 3/4"	I2416054	26,0	35,5	13,6	19,0	27,0	0,070
1 1/4" x 1/2"	I2416063	34,5	43,6	20,2	20,5	30,0	0,145
1 1/4" x 3/4"	I2416064	34,5	43,6	18,2	20,5	30,0	0,135
1 1/4" x 1"	I2416065	34,5	43,6	16,0	20,5	30,0	0,115
1 1/2" x 1/2"	I2416073	40,0	51,0	22,0	22,0	31,0	0,200
1 1/2" x 3/4"	I2416074	40,0	51,0	20,0	22,0	31,0	0,195
1 1/2" x 1"	I2416075	40,0	51,0	17,0	22,0	31,0	0,180
1 1/2" x 1 1/4"	I2416076	40,0	51,0	15,5	22,0	31,0	0,120
2" x 1/2"	I2416083	51,0	62,4	26,0	26,0	35,0	0,265
2" x 3/4"	I2416084	51,0	62,4	23,0	26,0	35,0	0,330
2" x 1"	I2416085	51,0	62,4	21,0	26,0	35,0	0,330
2" x 1 1/4"	I2416086	51,0	62,4	20,0	26,0	35,0	0,270
2" x 1 1/2"	I2416087	51,0	62,4	17,8	26,0	35,0	0,235
2 1/2" x 1"	I2416095	64,5	77,8	27,0	27,0	40,0	0,635
2 1/2" x 1 1/4"	I2416096	64,5	77,2	25,0	27,0	40,0	0,600
2 1/2" x 1 1/2"	I2416097	64,5	77,8	25,0	27,0	40,0	0,570
2 1/2" x 2"	I2416098	64,5	77,8	24,0	27,0	39,5	0,425
3" x 2"	I24160A8	77,2	91,2	27,3	33,0	44,0	0,800
3" x 2 1/2"	I24160A9	77,2	91,2	20,0	33,0	44,0	0,560
4" x 2"	I24160C8	101,3	116,6	27,0	36,0	48,0	0,650
4" x 2 1/2"	I24160C9	101,3	116,6	25,0	36,0	48,0	1,415
4" x 3"	I24160CA	101,3	116,6	23,3	36,0	48,0	1,205

Rev.2-07.23
1/2



CARATTERISTICHE FONDAMENTALI

- Realizzato in acciaio inossidabile austenitico AISI 316 con trattamento termico standard.
- Metodo di produzione: Fusione.
- Dimensioni secondo la norma ISO 4144.
- Filettature conformi la norma UNI EN 10226-1 / ISO 7-1 (tipo R-Rp).
- Temperatura di esercizio: da -20 a 220 °C.
- Pressione di esercizio: PN 20.

APPLICAZIONI GENERALI

- Acqua, aria, vapore, oli e gas.

Osservazioni:

Data la complessità, la varietà e l'elevato numero di specifiche particolari di ciascuna installazione, unitamente all'esistenza di vari fattori che possono influenzare le condizioni di lavoro e la natura del prodotto, è responsabilità dell'utente finale eseguire le prove necessarie per garantire il corretto funzionamento del prodotto in ogni specifica applicazione.

L'installazione del prodotto deve essere eseguita e mantenuta secondo codici di buona pratica e/o norme vigenti.

BASIC FEATURES

- Made of austenitic stainless steel AISI 316 with standard heat treatment.
- Production method: Fusion.
- Dimensions according to ISO 4144 standard.
- Threads according to EN 10226-1 / ISO 7-1 (type R-Rp).
- Working temperature range: -20 to 220 °C.
- Maximal working pressure: PN 20.

GENERAL APPLICATIONS

- Water, air, steam, oil and gas.

Remarks:

Due to the complexity, variety and large number of particular specifications for each installation, along with the existence of diverse factors which can affect the working conditions and nature of the product, it is the responsibility of the end-user to carry out the necessary tests to ensure the proper functioning of the product in any specific application.

Product installation must be carried out and maintained following the good practice codes and/or updated technical standards.

Nota: A causa del costante sviluppo dei nostri prodotti, i dati forniti possono essere modificati senza preavviso.

Note : Due to the continuous development of our products, specifications may be changed without notification at any time.

Rev.2-07.23
2/2