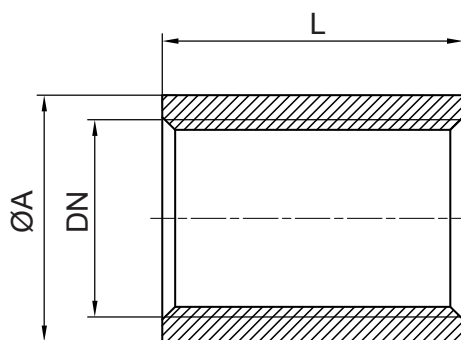


Fig. 270

RACCORDI FILETTATI IN ACCIAIO INOX - MANICOTTO
THREADED STAINLESS STEEL FITTING - SOCKET


ISO 4144


INFORMAZIONI TECNICHE - TECHNICAL INFORMATION

DN	COD.	DIMENSIONI - DIMENSIONS		Peso appros. Weight aprox. (kg)
		ØA (mm)	L (mm)	
1/8"	I2706000	15,0	17,0	0,010
1/4"	I2706001	18,5	25,0	0,025
3/8"	I2706002	21,3	26,0	0,040
1/2"	I2706003	26,6	34,0	0,060
3/4"	I2706004	31,8	36,0	0,070
1"	I2706005	39,5	43,0	0,130
1 1/4"	I2706006	48,3	48,0	0,190
1 1/2"	I2706007	54,5	48,0	0,220
2"	I2706008	66,3	56,0	0,290
2 1/2"	I2706009	82,0	65,0	0,420
3"	I270600A	95,0	71,0	0,540
4"	I270600C	122,0	83,0	0,900

CARATTERISTICHE FONDAMENTALI

- Realizzato in tubo di acciaio inox AISI 316 saldato.
- Dimensioni secondo la norma ISO 4144.
- Filettature conformi la norma UNI EN 10226-1 / ISO 7-1 (tipo R-Rp).
- Temperatura di esercizio: da -20 a 220 °C.
- Pressione di esercizio: PN 20.

APPLICAZIONI GENERALI

- Acqua, aria, vapore, oli e gas.

Osservazioni:

Data la complessità, la varietà e l'elevato numero di specifiche particolari di ciascuna installazione, unitamente all'esistenza di vari fattori che possono influenzare le condizioni di lavoro e la natura del prodotto, è responsabilità dell'utente finale eseguire le prove necessarie per garantire il corretto funzionamento del prodotto in ogni specifica applicazione.

L'installazione del prodotto deve essere eseguita e mantenuta secondo codici di buona pratica e/o norme vigenti.

BASIC FEATURES

- Made of AISI 316 L from welding pipe.
- Dimensions according to ISO 4144 standard.
- Threads according to EN 10226-1 / ISO 7-1 (type R-Rp).
- Working temperature range: -20 to 220 °C.
- Maximal working pressure: PN 20.

GENERAL APPLICATIONS

- Water, air, steam, oil and gas.

Remarks:

Due to the complexity, variety and large number of particular specifications for each installation, along with the existence of diverse factors which can affect the working conditions and nature of the product, it is the responsibility of the end-user to carry out the necessary tests to ensure the proper functioning of the product in any specific application.

Product installation must be carried out and maintained following the good practice codes and/or updated technical standards.

Nota: A causa del costante sviluppo dei nostri prodotti, i dati forniti possono essere modificati senza preavviso.

Note: Due to the continuous development of our products, specifications may be changed without notification at any time.

Rev.4-02.26



Polígono Industrial ATUSA - Agurain S/N - 01200 Salvatierra (Alava) España
 Tel.: (+34) 945 18 00 00 Fax : (+34) 945 30 01 53 e-mail: ventas@atusagroup.com
www.atusagroup.com