



Fig. 280

RACCORDI FILETTATI IN ACCIAIO INOX - NIPPLE

THREADED STAINLESS STEEL FITTING - HEXAGON NIPPLE



ISO 4144

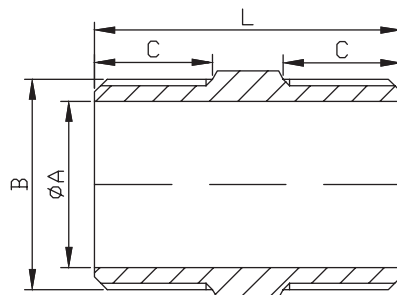

INFORMAZIONI TECNICHE - TECHNICAL INFORMATION

DN	COD.	DIMENSIONI - DIMENSIONS					Peso appros. Weight aprox. (kg)
		Ø A (mm)	C (mm)	D (mm)	L (mm)	Facce Face	
1/8"	I2806000	5,10	12,00	13,00	30,30	6	0,015
1/4"	I2806001	7,90	13,40	15,00	32,02	6	0,020
3/8"	I2806002	10,70	14,80	19,00	36,70	6	0,035
1/2"	I2806003	14,90	16,44	22,00	41,70	6	0,050
3/4"	I2806004	19,90	18,46	27,30	44,94	6	0,075
1"	I2806005	26,00	18,60	35,30	48,10	8	0,120
1 1/4"	I2806006	34,50	20,60	44,60	53,40	8	0,180
1 1/2"	I2806007	39,90	21,50	50,60	55,50	8	0,220
2"	I2806008	51,00	25,60	62,50	64,20	8	0,330
2 1/2"	I2806009	64,50	30,80	78,00	76,00	8	0,670
3"	I280600A	77,20	33,30	91,70	79,70	8	0,860
4"	I280600C	101,30	36,00	118,00	85,70	8	1,345

CARATTERISTICHE FONDAMENTALI

- Realizzato in acciaio inossidabile austenitico AISI 316 con trattamento termico standard.
- Metodo di produzione: Fusione.
- Dimensioni secondo la norma ISO 4144.
- Filettature conformi la norma UNI EN 10226-1 / ISO 7-1 (tipo R-Rp).
- Temperatura di esercizio: da -20 a 220 °C.
- Pressione di esercizio: PN 20.

APPLICAZIONI GENERALI

- Acqua, aria, vapore, oli e gas.

Osservazioni:

Data la complessità, la varietà e l'elevato numero di specifiche particolari di ciascuna installazione, unitamente all'esistenza di vari fattori che possono influenzare le condizioni di lavoro e la natura del prodotto, è responsabilità dell'utente finale eseguire le prove necessarie per garantire il corretto funzionamento del prodotto in ogni specifica applicazione.

L'installazione del prodotto deve essere eseguita e mantenuta secondo codici di buona pratica e/o norme vigenti.

BASIC FEATURES

- Made of austenitic stainless steel AISI 316 with standard heat treatment.
- Production method: Fusion.
- Dimensions according to ISO 4144 standard.
- Threads according to EN 10226-1 / ISO 7-1 (type R-Rp).
- Working temperature range: -20 to 220 °C.
- Maximal working pressure: PN 20.

GENERAL APPLICATIONS

- Water, air, steam, oil and gas.

Remarks:

Due to the complexity, variety and large number of particular specifications for each installation, along with the existence of diverse factors which can affect the working conditions and nature of the product, it is the responsibility of the end-user to carry out the necessary tests to ensure the proper functioning of the product in any specific application.

Product installation must be carried out and maintained following the good practice codes and/or updated technical standards.

Nota: A causa del costante sviluppo dei nostri prodotti, i dati forniti possono essere modificati senza preavviso.

Note : Due to the continuous development of our products, specifications may be changed without notification at any time.

Rev.2-07.23



Polígono Industrial ATUSA - Agurain S/N - 01200 Salvatierra (Alava) España
Tel.: (+34) 945 18 00 00 Fax : (+34) 945 30 01 53 e-mail: ventas@atusagroup.com
www.atusagroup.com