
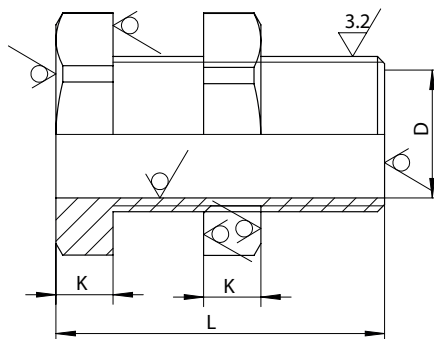


Fig. 285

RACCORDI FILETTATI IN ACCIAIO INOX - RACCORDO PASSAPARETE
THREADED STAINLESS STEEL FITTING - WALL CONNECTOR


ISO 4144


INFORMAZIONI TECNICHE - TECHNICAL INFORMATION

DN	COD.	DIMENSIONI - DIMENSIONS				Peso appros. Weight aprox. (kg)
		L (mm)	S (mm)	K (mm)	D (mm)	
3/8"	I2856002	46	27	8	11,5	0,085
1/2"	I2856003	57	32	10	15,5	0,140
3/4"	I2856004	57	36	10	20,5	0,170
1"	I2856005	69	46	12	27,0	0,305
1 1/4"	I2856006	69	55	12	35,0	0,405
1 1/2"	I2856007	70	60	14	40,0	0,540
2"	I2856008	82	75	16	51,0	0,915

CARATTERISTICHE FONDAMENTALI

- Realizzato in acciaio inossidabile austenitico AISI 316 con trattamento termico standard.
- Metodo di produzione: Fusione.
- Dimensioni secondo la norma ISO 4144.
- Filettature conformi la norma UNI EN 10226-1 / ISO 7-1 (tipo R-Rp).
- Temperatura di esercizio: da -20 a 220 °C.
- Pressione di esercizio: PN 20.

APPLICAZIONI GENERALI

- Acqua, aria, vapore, oli e gas.

Osservazioni:

Data la complessità, la varietà e l'elevato numero di specifiche particolari di ciascuna installazione, unitamente all'esistenza di vari fattori che possono influenzare le condizioni di lavoro e la natura del prodotto, è responsabilità dell'utente finale eseguire le prove necessarie per garantire il corretto funzionamento del prodotto in ogni specifica applicazione.

L'installazione del prodotto deve essere eseguita e mantenuta secondo codici di buona pratica e/o norme vigenti.

BASIC FEATURES

- Made of austenitic stainless steel AISI 316 with standard heat treatment.
- Production method: Fusion.
- Dimensions according to ISO 4144 standard.
- Threads according to EN 10226-1 / ISO 7-1 (type R-Rp).
- Working temperature range: -20 to 220 °C.
- Maximal working pressure: PN 20.

GENERAL APPLICATIONS

- Water, air, steam, oil and gas.

Remarks:

Due to the complexity, variety and large number of particular specifications for each installation, along with the existence of diverse factors which can affect the working conditions and nature of the product, it is the responsibility of the end-user to carry out the necessary tests to ensure the proper functioning of the product in any specific application.

Product installation must be carried out and maintained following the good practice codes and/or updated technical standards.

Nota: A causa del costante sviluppo dei nostri prodotti, i dati forniti possono essere modificati senza preavviso.

Note : Due to the continuous development of our products, specifications may be changed without notification at any time.

Rev.2-07.23



Polígono Industrial ATUSA - Agurain S/N - 01200 Salvatierra (Alava) España
 Tel.: (+34) 945 18 00 00 Fax : (+34) 945 30 01 53 e-mail: ventas@atusagroup.com
www.atusagroup.com