




AISI 316L

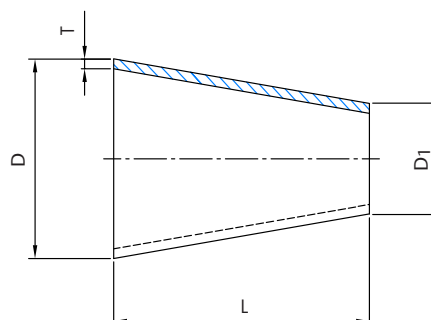

CARATTERISTICHE FONDAMENTALI

- Realizzato in acciaio inossidabile AISI 316L.
- Conforme alla norma DIN 11852.
- Finitura: Lucida.
- Finitura della superficie interna $Ra \leq 0,8 \mu m$.
- Giunzione di tubi in acciaio inox secondo DIN 11850 e UNI EN 10357.

BASIC FEATURES

- Made of stainless steel AISI 316L.
- According to DIN 11852 standard.
- Ending: Polish.
- Internal surface finished $Ra \leq 0,8 \mu m$.
- Joining of stainless steel pipes according DIN 11850 and EN 10357.

INFORMAZIONI TECNICHE - TECHNICAL INFORMATION

Designazione - Designation				DIMENSIONI - DIMENSIONS			Peso appros. Weight aprox. (g)
COD.	Tubo di acciaio Steel tube			Diametro esterno Outside diameter	Spessore Thickness	Lunghezza Length	
	DN	NPS	Ø est (mm)	D x D1 (mm)	T (mm)	L (mm)	
I2RC6043	20 x 15	3/4" x 1/2"	23,0 x 19,0	23,0 ± 0,2 x 19,0 ± 0,1	1,5 ± 0,2	7 ± 2	10
I2RC6054	25 x 20	1" x 3/4"	29,0 x 23,0	29,0 ± 0,2 x 23,0 ± 0,2	1,5 ± 0,2	11 ± 2	25
I2RC6064	32 x 20	1 1/4" x 3/4"	35,0 x 23,0	35,0 ± 0,2 x 23,0 ± 0,2	1,5 ± 0,2	22 ± 2	35
I2RC6065	32 x 25	1 1/4" x 1"	35,0 x 29,0	35,0 ± 0,2 x 29,0 ± 0,2	1,5 ± 0,2	11 ± 2	37
I2RC6074	40 x 20	1 1/2" x 3/4"	41,0 x 23,0	41,0 ± 0,2 x 23,0 ± 0,2	1,5 ± 0,2	33 ± 2	45
I2RC6075	40 x 25	1 1/2" x 1"	41,0 x 29,0	41,0 ± 0,2 x 29,0 ± 0,2	1,5 ± 0,2	22 ± 2	40
I2RC6076	40 x 32	1 1/2" x 1 1/4"	41,0 x 35,0	41,0 ± 0,2 x 35,0 ± 0,2	1,5 ± 0,2	11 ± 2	45
I2RC6085	50 x 25	2" x 1"	53,0 x 29,0	53,0 ± 0,3 x 29,0 ± 0,2	1,5 ± 0,2	44 ± 2	74
I2RC6086	50 x 32	2" x 1 1/4"	53,0 x 35,0	53,0 ± 0,3 x 35,0 ± 0,2	1,5 ± 0,2	33 ± 2	78
I2RC6087	50 x 40	2" x 1 1/2"	53,0 x 41,0	53,0 ± 0,3 x 41,0 ± 0,2	1,5 ± 0,2	22 ± 2	40
I2RC6096	65 x 32	2 1/2" x 1 1/4"	70,0 x 35,0	70,0 ± 0,4 x 35,0 ± 0,2	2,0 ± 0,2	63 ± 2	200
I2RC6097	65 x 40	2 1/2" x 1 1/2"	70,0 x 41,0	70,0 ± 0,4 x 41,0 ± 0,2	2,0 ± 0,2	51 ± 2	125
I2RC6098	65 x 50	2 1/2" x 2"	70,0 x 53,0	70,0 ± 0,4 x 53,0 ± 0,3	2,0 ± 0,2	29 ± 2	80
I2RC60A7	80 x 40	3" x 1 1/2"	85,0 x 41,0	85,0 ± 0,4 x 41,0 ± 0,2	2,0 ± 0,2	80 ± 2	225
I2RC60A8	80 x 50	3" x 2"	85,0 x 53,0	85,0 ± 0,4 x 53,0 ± 0,3	2,0 ± 0,2	56 ± 2	175
I2RC60C8	100 x 50	4" x 2"	104,0 x 53,0	104,0 ± 0,8 x 53,0 ± 0,3	2,0 ± 0,2	93 ± 2	365

Osservazioni:

Data la complessità, la varietà e l'elevato numero di specifiche particolari di ciascuna installazione, unitamente all'esistenza di vari fattori che possono influenzare le condizioni di lavoro e la natura del prodotto, è responsabilità dell'utente finale eseguire le prove necessarie per garantire il corretto funzionamento del prodotto in ogni specifica applicazione. L'installazione del prodotto deve essere eseguita e mantenuta secondo codici di buona pratica e/o norme vigenti.

Remarks:

Due to the complexity, variety and large number of particular specifications for each installation, along with the existence of diverse factors which can affect the working conditions and nature of the product, it is the responsibility of the end-user to carry out the necessary tests to ensure the proper functioning of the product in any specific application.

Product installation must be carried out and maintained following the good practice codes and/or updated technical standards.

Nota: A causa del costante sviluppo dei nostri prodotti, i dati forniti possono essere modificati senza preavviso.

Note: Due to the continuous development of our products, specifications may be changed without notification at any time.

Rev.1-05.24



Polígono Industrial ATUSA - Agurain S/N - 01200 Salvatierra (Alava) España
 Tel.: (+34) 945 18 00 00 Fax : (+34) 945 30 01 53 e-mail: ventas@atusagroup.com
www.atusagroup.com