



GIRELLA CIECA DIN 11851


BLIND NUT DIN 11851



DN 25 - DN 50



DN 65 - DN 100

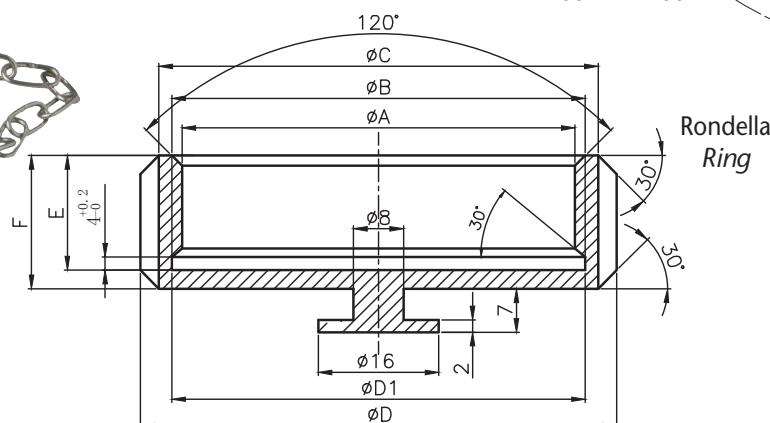

Rondella
Ring

CARATTERISTICHE FONDAMENTALI

- Realizzato in acciaio inossidabile AISI 304.
- Conforme alla norma DIN 11851.
- Finitura: Lucida.
- Finitura della superficie interna $Ra \leq 0,8 \mu m$.
- Guarnizione in EPDM inclusa.
- Catena e anello inclusi.

BASIC FEATURES

- Made of stainless steel AISI 304.
- According to DIN 11851 standard.
- Ending: Polish.
- Internal surface finished $Ra \leq 0,8 \mu m$.
- EPDM gasket included.
- Chain and ring included.

INFORMAZIONI TECNICHE - TECHNICAL INFORMATION

DN	COD.	DIMENSIONI - DIMENSIONS									Peso appross. Weight approx. (g)
		$\varnothing A$ (mm)	$\varnothing B$ (mm)	$\varnothing D1$ (mm)	$\varnothing C$ (mm)	$\varnothing D$ (mm)	E (mm)	F (mm)	G (mm)	H (mm)	
25	I3834005	63	RD52x1/6	535	56	63	18	21	35	8	245
32	I3834006	70	RD58x1/6	595	62	70	18	21	4	8	290
40	I3834007	78	RD65x1/6	665	70	78	18	21	4	10	340
50	I3834008	92	RD78x1/6	795	84	92	19	22	4	10	500
65	I3834009	112	RD95x1/6	965	102	112	21	25	5	10	737
80	I383400A	127	RD110x1/4	111,8	117	127	25	30	5	10	1.105
100	I383400C	148	RD130x1/4	131,8	138	148	26	31	5	12	1.625

Osservazioni:

Data la complessità, la varietà e l'elevato numero di specifiche particolari di ciascuna installazione, unitamente all'esistenza di vari fattori che possono influenzare le condizioni di lavoro e la natura del prodotto, è responsabilità dell'utente finale eseguire le prove necessarie per garantire il corretto funzionamento del prodotto in ogni specifica applicazione. L'installazione del prodotto deve essere eseguita e mantenuta secondo codici di buona pratica e/o norme vigenti.

Remarks:

Due to the complexity, variety and large number of particular specifications for each installation, along with the existence of diverse factors which can affect the working conditions and nature of the product, it is the responsibility of the end-user to carry out the necessary tests to ensure the proper functioning of the product in any specific application.

Product installation must be carried out and maintained following the good practice codes and/or updated technical standards.

Nota: A causa del costante sviluppo dei nostri prodotti, i dati forniti possono essere modificati senza preavviso.

Note: Due to the continuous development of our products, specifications may be changed without notification at any time.

Rev.1-05.23



Polígono Industrial ATUSA - Agurain S/N - 01200 Salvatierra (Alava) España
Tel.: (+34) 945 18 00 00 Fax : (+34) 945 30 01 53 e-mail: ventas@atusagroup.com
www.atusagroup.com