


GUARNIZIONE CLAMP FERRULE CLAMP GASKET

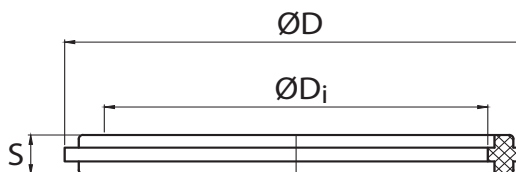

INFORMAZIONI TECNICHE - TECHNICAL INFORMATION

Designazione - <i>Designation</i>					Norma di applicazione <i>Application standard</i>	DIMENSIONI - <i>DIMENSIONS</i>			Peso appros. <i>Weight approx. (g)</i>
COD.		Tubo di acciaio <i>Steel tube</i>				Diametro interno <i>Bore diameter</i>	Diametro esterno <i>Outside diameter</i>	Spessore <i>Thickness</i>	
EPDM	NBR	DN	NPS	Ød (mm)		ØDi (mm)	ØDe (mm)	S (mm)	
IRCJE009 ¹⁾	IRCJN009 ¹⁾		1/2"	12,7	3-A / ASME BPE	9,9	21,8	5,2	1
IRCJE010 ²⁾	IRCJN010 ²⁾	10		12,0	EHEDG / DIN 32676	10,2	34,0	5,5	3
IRCJE015 ²⁾	IRCJN015 ²⁾	15		18,0	EHEDG / DIN 32676	16,2	34,0	5,5	3
IRCJE016 ¹⁾	IRCJN016 ¹⁾		3/4"	19,05	3-A / ASME BPE	16,2	21,8	5,2	1
IRCJE020 ²⁾	IRCJN020 ²⁾	20		22,0	EHEDG / DIN 32676	20,2	34,0	5,5	2
IRCJE022 ¹⁾	IRCJN022 ¹⁾		1"	25,4	3-A / ASME BPE	22,8	50,5	5,5	5
IRCJE025 ²⁾	IRCJN025 ²⁾	25		28,0	EHEDG / DIN 32676	26,2	50,5	5,5	5
IRCJE032 ²⁾	IRCJN032 ²⁾	32		34,0	EHEDG / DIN 32676	32,2	50,5	5,5	5
IRCJE035 ¹⁾	IRCJN035 ¹⁾		1 1/2"	38,1	3-A / ASME BPE	35,8	50,5	5,5	5
IRCJE040 ²⁾	IRCJN040 ²⁾	40		40,0	EHEDG / DIN 32676	38,2	50,5	5,5	4
IRCJE048 ¹⁾	IRCJN048 ¹⁾		2"	50,8	3-A / ASME BPE	48,8	64,0	5,5	6
IRCJE050 ²⁾	IRCJN050 ²⁾	50		52,0	EHEDG / DIN 32676	50,2	64,0	5,5	6
IRCJE060 ¹⁾	IRCJN060 ¹⁾		2 1/2"	63,5	3-A / ASME BPE	60,5	77,5	5,5	8
IRCJE065 ²⁾	IRCJN065 ²⁾	65		70,0	EHEDG / DIN 32676	66,2	91,0	5,5	12
IRCJE073 ¹⁾	IRCJN073 ¹⁾		3"	76,2	3-A / ASME BPE	73,1	91,0	5,5	12
IRCJE080 ²⁾	IRCJN080 ²⁾	80		85,0	EHEDG / DIN 32676	81,2	106,0	5,5	14
IRCJE097 ¹⁾	IRCJN097 ¹⁾		4"	101,6	3-A / ASME BPE	97,8	119,0	5,5	13
IRCJE100 ²⁾	IRCJN100 ²⁾	100		104,0	EHEDG / DIN 32676	100,2	119,0	5,5	13

CARATTERISTICHE FONDAMENTALI

- Realizzato in EPDM o NBR.

Osservazioni:

¹⁾ Applicabile con raccordi conformi ASME BPE e BS 4825-3.

²⁾ Applicabile con raccordi conformi DIN 32676 e ISO 2852.

Osservazioni:

Data la complessità, la varietà e l'elevato numero di specifiche particolari di ciascuna installazione, unitamente all'esistenza di vari fattori che possono influenzare le condizioni di lavoro e la natura del prodotto, è responsabilità dell'utente finale eseguire le prove necessarie per garantire il corretto funzionamento del prodotto in ogni specifica applicazione.

L'installazione del prodotto deve essere eseguita e mantenuta secondo codici di buona pratica e/o norme vigenti.

BASIC FEATURES

- Made of EPDM or NBR.

Remarks:

¹⁾ Applicable with fittings according to ASME BPE and BS 4825-3.

²⁾ Applicable with fittings according to DIN 32676 and ISO 2852.

Remarks:

Due to the complexity, variety and large number of particular specifications for each installation, along with the existence of diverse factors which can affect the working conditions and nature of the product, it is the responsibility of the end-user to carry out the necessary tests to ensure the proper functioning of the product in any specific application.

Product installation must be carried out and maintained following the good practice codes and/or updated technical standards.

Nota: A causa del costante sviluppo dei nostri prodotti, i dati forniti possono essere modificati senza preavviso.

Note : Due to the continuous development of our products, specifications may be changed without notification at any time.

Rev.1-02.23



Polígono Industrial ATUSA - Agurain S/N - 01200 Salvatierra (Alava) España
Tel.: (+34) 945 18 00 00 Fax : (+34) 945 30 01 53 e-mail: ventas@atusagroup.com
www.atusagroup.com