


FILTRO A "Y" INOX F/F STAINLESS STEEL "Y" STRAINER F/F

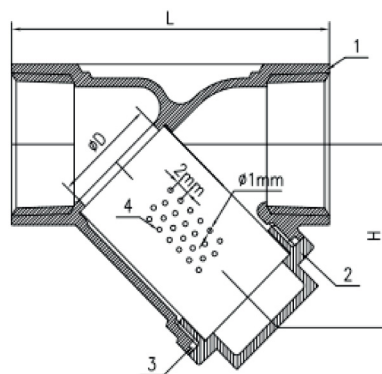

DESCRIZIONE DEI COMPONENTI - COMPONENTS DESCRIPTION

Ítem	Descrizione - Description	Materiale - Material
1	Corpo - Body	Acciaio Inox - Stainless Steel AISI 316-1.4401
2	Tappo - Cap	Acciaio Inox - Stainless Steel AISI 316-1.4401
3	Guarnizione - Gasket	PTFE
4	Maglia - Screen	Acciaio Inox - Stainless Steel AISI 316-1.4401

CARATTERISTICHE TECNICHE

- Fabbricazione in acciaio inox CF8M (AISI 316).
- Pressione massima di esercizio: PN 50.
- Temperatura di esercizio: da -20 °C a 160 °C.
- Estremità filettate secondo UNI 10226-1 e ISO 7-1.
- Ideale per il trasporto di acqua, gas e olio.

APPLICAZIONI GENERALI

- Industria chimica, alimentare, termica e farmaceutica.
- Reti di acqua, gas, vapore, condensato e olio.

Osservazioni:

Data la complessità, la varietà e l'elevato numero di specifiche particolari di ciascuna installazione, unitamente all'esistenza di vari fattori che possono influenzare le condizioni di lavoro e la natura del prodotto, è responsabilità dell'utente finale eseguire le prove necessarie per garantire il corretto funzionamento del prodotto in ogni specifica applicazione.

L'installazione del prodotto deve essere eseguita e mantenuta secondo codici di buona pratica e/o norme vigenti.

BASIC FEATURES

- Made in CF8M (AISI 316).
- Maximum working pressure: PN 50.
- Working temperature: -20 °C to 160 °C.
- Female threads ends according to EN 10226-1 and ISO 7-1.
- Ideal for water, air, oil and gas applications.

GENERAL APPLICATIONS

- Chemical, food, thermal and pharmaceutical industries.
- Water lines, gas, steam, condensates and oils.

Remarks:

Due to the complexity, variety and large number of particular specifications for each installation, along with the existence of diverse factors which can affect the working conditions and nature of the product, it is the responsibility of the end-user to carry out the necessary tests to ensure the proper functioning of the product in any specific application.

Product installation must be carried out and maintained following the good practice codes and/or updated technical standards.

INFORMAZIONI TECNICHE - TECHNICAL INFORMATION

Dimensione Size (inches)	COD.	PN	DIMENSIONI - DIMENSIONS			Peso appros. Weight aprox. (kg)
			ØD (mm)	H (mm)	L (mm)	
1/2"	IVF00063	40	10	38	65	0,22
3/4"	IVF00064	40	20	55	80	0,36
1"	IVF00065	40	25	56	90	0,68
1 1/4"	IVF00066	40	32	60	105	0,78
1 1/2"	IVF00067	40	40	70	120	1,12
2"	IVF00068	40	50	82	140	1,78


Rev.3-07.23
1/2



Polígono Industrial ATUSA - Agurain S/N - 01200 Salvatierra (Alava) España
Tel.: (+34) 945 18 00 00 Fax : (+34) 945 30 01 53 e-mail: ventas@atusagroup.com
www.atusagroup.com



DIAGRAMMA PRESSIONE - TEMPERATURA / PRESSURE - TEMPERATURE DIAGRAM

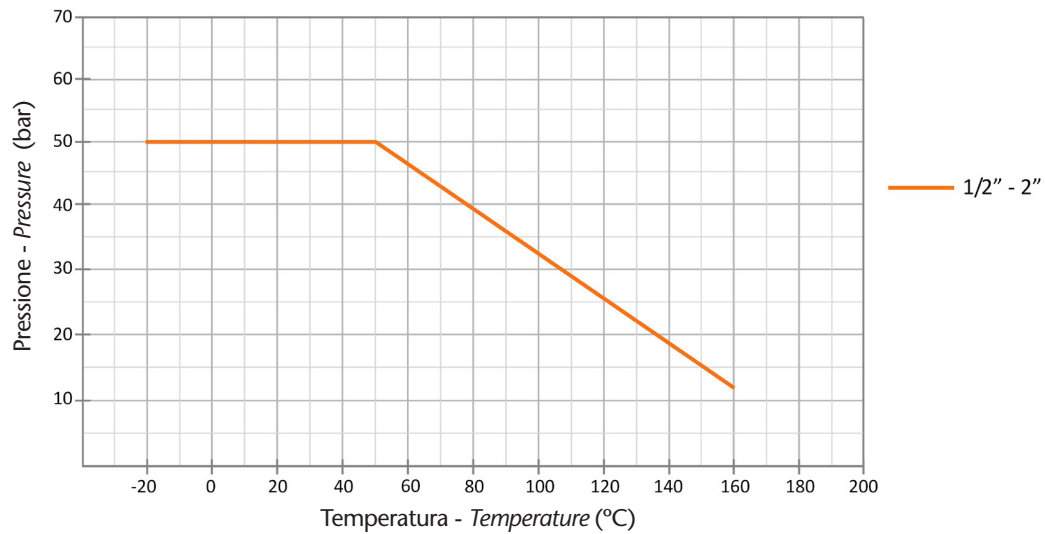

Nota: A causa del costante sviluppo dei nostri prodotti, i dati forniti possono essere modificati senza preavviso.
Note : Due to the continuous development of our products, specifications may be changed without notification at any time.

Rev.3-07.23
2/2