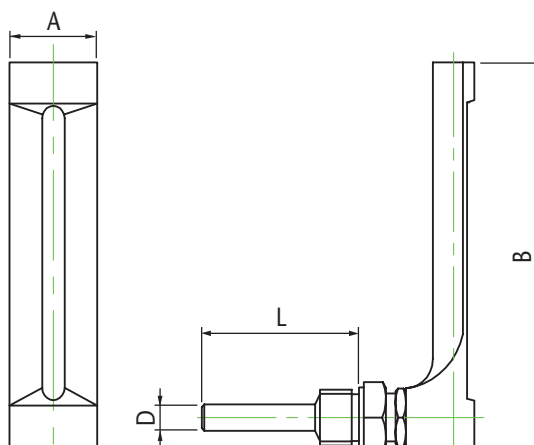


670

TERMOMETRO A CAPILLA - CONNESSIONE POSTERIORE
AXIAL MONOBLOK THERMOMETER - BACK CONNECTION

INFORMAZIONI TECNICHE - TECHNICAL INFORMATION

Gamma di temperatura Temperature range (°C)	COD.	DIMENSIONI - DIMENSIONS				Peso appross. Weight approx. (g)
		A (mm)	B (mm)	D (mm)	L (mm)	
-30 °C - 50 °C	VS670505	33	150	10	50	230
0 °C - 60 °C	VS670506	33	150	10	50	230
0 °C - 120 °C	VS670501	33	150	10	50	230
-30 °C - 50 °C	VS670105	33	150	10	100	250
0 °C - 60 °C	VS670106	33	150	10	100	250
0 °C - 120 °C	VS670101	33	150	10	100	250

CARATTERISTICHE TECNICHE

- Cassa in alluminio anodizzato.
- Finestra in vetro con divisioni.
- Stelo in ottone da 50 e/o 100 mm.
- Connessione posteriore da 1/2".
- Doppia scala: °C / °F.

APPLICAZIONI GENERALI

- Riscaldamento.
- Aria condizionata.
- Industria navale.

Osservazioni:

Data la complessità, la varietà e l'elevato numero di specifiche particolari di ciascuna installazione, unitamente all'esistenza di vari fattori che possono influenzare le condizioni di lavoro e la natura del prodotto, è responsabilità dell'utente finale eseguire le prove necessarie per garantire il corretto funzionamento del prodotto in ogni specifica applicazione.

L'installazione del prodotto deve essere eseguita e mantenuta secondo codici di buona pratica e/o norme vigenti.

BASIC FEATURES

- Case in anodized aluminum.
- Glass window with divisions.
- Brass stem with 50 and/or 100 mm.
- 1/2" back connection.
- Double scale: °C / °F.

GENERAL APPLICATIONS

- Heating.
- Air conditioning.
- Naval industry.

Remarks:

Due to the complexity, variety and large number of particular specifications for each installation, along with the existence of diverse factors which can affect the working conditions and nature of the product, it is the responsibility of the end-user to carry out the necessary tests to ensure the proper functioning of the product in any specific application.

Product installation must be carried out and maintained following the good practice codes and/or updated technical standards.

Nota: A causa del costante sviluppo dei nostri prodotti, i dati forniti possono essere modificati senza preavviso.

Note: Due to the continuous development of our products, specifications may be changed without notification at any time.

Rev.0-02.25



Polígono Industrial ATUSA - Agurain S/N - 01200 Salvatierra (Alava) España
 Tel.: (+34) 945 18 00 00 Fax : (+34) 945 30 01 53 e-mail: ventas@atusagroup.com
www.atusagroup.com