
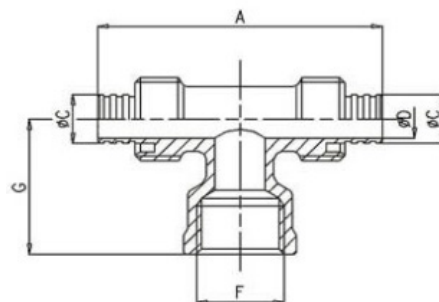


ACESSÓRIOS DE COMPRESSÃO PARA TUBO PE-X - TÊ FÊMEA

COMPRESSION FITTINGS FOR PE-X PIPES - FEMALE TEE

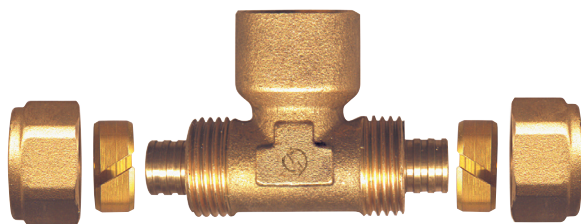

INFORMAÇÃO TÉCNICA - TECHNICAL INFORMATION

Ø	COD.	DIMENSÕES - DIMENSIONS					Peso aprox. Weight approx. (g)
		A (mm)	B (mm)	C (mm)	F (polegadas/inches)	G (mm)	
1/2" x 15 x 2,5	TR8TH153	61,4	10,0	7,0	G 1/2"	22,5	130
1/2" x 16 x 2,0	TR9TH163	61,4	12,0	9,5	G 1/2"	22,5	119
1/2" x 16 x 2,2	TR8TH163	61,4	11,6	9,0	G 1/2"	22,5	121
1/2" x 18 x 2,5	TR8TH183	74,0	13,0	10,0	G 1/2"	34,0	192
1/2" x 20 x 2,0	TR9TH203	78,0	16,0	12,5	G 1/2"	34,0	220
1/2" x 22 x 3,0	TR8TH223	82,0	16,0	12,0	G 1/2"	35,0	338
3/4" x 16 x 2,0	TR9TH164	72,0	12,0	9,5	G 3/4"	35,0	193
3/4" x 16 x 2,2	TR8TH164	72,0	11,6	9,0	G 3/4"	35,0	195
3/4" x 20 x 2,0	TR9TH204	78,0	16,0	12,5	G 3/4"	34,0	230
3/4" x 20 x 2,8	TR8TH204	78,0	14,4	11,0	G 3/4"	34,0	241
3/4" x 22 x 3,0	TR8TH224	82,0	16,0	12,0	G 3/4"	35,0	354
3/4" x 25 x 2,3	TR9TH254	89,0	20,4	16,0	G 3/4"	38,5	363
3/4" x 25 x 3,5	TR8TH254	89,0	18,0	14,0	G 3/4"	38,5	402
3/4" x 32 x 3,0	TR9TH324	100,0	26,0	21,0	G 3/4"	41,5	530
1" x 25 x 2,3	TR9TH255	89,0	20,4	16,5	G 1"	42,0	388
1" x 25 x 3,5	TR8TH255	89,0	18,0	14,0	G 1"	42,0	469
1" x 32 x 3,0	TR9TH325	100,0	26,0	21,0	G 1"	45,0	552

CARACTERÍSTICAS BÁSICAS

- Corpo em latão CW617N segundo NP EN 12165.
- Anilha em latão CW617N segundo NP EN 12164.
- Porca em latão CW617N segundo NP EN 12165.
- Acessórios conformes a norma NP EN 1254-3.
- Roscas de união conformes NP EN ISO 228-1.
- Temperatura de serviço: -20 °C a 95 °C.
- Pressão máxima de serviço: PN 10.

APLICAÇÕES GERAIS

- Água fria e quente em instalações hidro-sanitárias e aquecimento.

BASIC FEATURES

- Body in brass CW617N according to EN 12165.
- Ring in brass CW617N according to EN 12164.
- Nut in brass CW617N according to EN 12165.
- Fittings comply with the EN 1254-3 standard.
- Threads according to EN ISO 228-1.
- Working temperature range: -20 °C to 95 °C.
- Maximal working pressure: PN 10.

GENERAL APPLICATIONS

- Cold and hot water in sanitary and heating installations.

Rev.1-09.23

1/2



Polígono Industrial ATUSA - Agurain S/N - 01200 Salvatierra (Alava) España
Tel.: (+34) 945 18 00 00 Fax : (+34) 945 30 01 53 e-mail: ventas@atusagroup.com
www.atusagroup.com



INSTRUÇÕES DE MONTAGEM

- Cortar o tubo perpendicularmente ao seu eixo utilizando uma ferramenta corta-tubo apropriada.
- Eliminar a rebarba.
- Inserir a anilha e a porca no tubo.
- Inserir o tubo no corpo até chegar ao topo.
- Com uma chave hexagonal apertar a porca, tendo em atenção nunca exceder o binário de aperto da peça.

Observações:

Dada a complexidade, variedade e grande quantidade de especificações particulares de cada instalação, em conjugação com a existência de diversos factores que podem afectar as condições de trabalho e natureza do produto, é da responsabilidade do utilizador final realizar os ensaios necessários para garantir o correcto funcionamento do produto em cada aplicação concreta.

A instalação do produto deverá ser realizada e mantida seguindo os códigos de boa prática e/ou normas existentes.

ASSEMBLING INSTRUCTIONS

- Cut the pipe perpendicularly to its axis using an appropriate pipe-cutting tool.
- Remove possible residual burr.
- Insert nut and olive on the pipe.
- Insert the pipe into the body until the pipe stop.
- With an hexagonal spanner screw the nut. Pay attention to not exceeding in fitting clamping.

Remarks:

Due to the complexity, variety and large number of particular specifications for each installation, along with the existence of diverse factors which can affect the working conditions and nature of the product, it is the responsibility of the end-user to carry out the necessary tests to ensure the proper functioning of the product in any specific application.

Product installation must be carried out and maintained following the good practice codes and/or updated technical standards.

Nota : Devido ao constante desenvolvimento dos nossos produtos, o desenho e os dados fornecidos podem ser alterados sem aviso prévio.

Note : Due to the continuous development of our products, specifications may be changed without notification at any time.

Rev.1-09.23

2/2

