
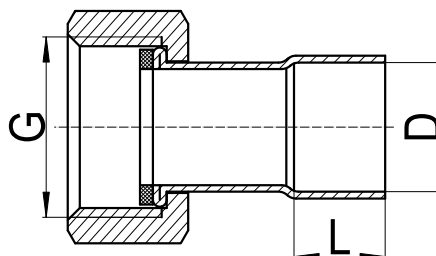


Fig. 359

TERMINAL ABOCARDADO LATÃO **BRASS STRAIGHT TAP CONNECTOR**

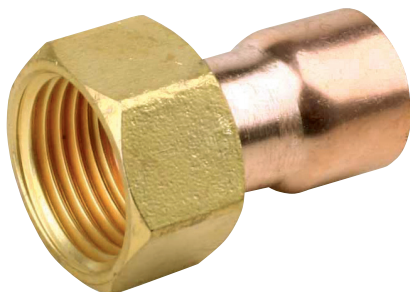

INFORMAÇÃO TÉCNICA - TECHNICAL INFORMATION

DN	COD.	DIMENSÕES - DIMENSIONS			Peso aprox. Weight aprox. (g)
		D (mm)	G (inches)	L (mm)	
15 x 1/2"	LSR59153	15	1/2"	10,6	38,0
15 X 3/4"	LSR59154	15	3/4"	10,6	62,0
18 x 1/2"	LSR59183	18	1/2"	12,6	41,0
18 x 3/4"	LSR59184	18	3/4"	12,6	62,5
18 x 1"	LSR59185	18	3/4"	12,6	95,0
22 x 1/2"	LSR59223	22	1/2"	15,4	44,5
22 x 3/4"	LSR59224	22	3/4"	15,4	68,0
22 x 1"	LSR59225	22	1"	15,4	92,0
28 x 1"	LSR59285	28	1"	18,4	95,5

CARACTERÍSTICAS BÁSICAS

- Corpo em cobre.
- Porca em latão MS58.
- Junta em NBR.
- Método de fabrico: Forjado a quente.
- Roscas de união conformes NP EN ISO 228-1.
- Acessórios de acordo com a norma NP EN 1254-4.
- Pressão máxima de serviço: PN 16.

APLICAÇÕES GERAIS

- Água sanitária fria e quente.

INSTRUÇÕES DE MONTAGEM

- Aplicar na rosca teflon ou vedante similar para obter uma maior estanquidade na união.
- Evitar o excesso de material de vedação aplicado para prevenir possíveis roturas causadas por aperto excessivo.
- Montar o acessório na instalação, tendo em atenção nunca apertar excessivamente mesmo.

BASIC FEATURES

- Body in cooper.
- Nut in brass MS58.
- Gasket in NBR.
- Production method: Hot forging.
- Threads according to EN ISO 228-1.
- Fittings comply with EN 1254-4 standard.
- Maximal working pressure: PN 16.

GENERAL APPLICATIONS

- Cold and hot sanitary water.

ASSEMBLING INSTRUCTIONS

- Place over the fitting PTFE or similar sealant in order to obtain a better tightness on the coupling.
- Avoid any surplus of sealant in order to prevent possible breakings caused by excessive clamping.
- Connect the fitting with the installation. Pay attention to not exceeding in fitting clamping.

Nota : Devido ao constante desenvolvimento dos nossos produtos, o desenho e os dados fornecidos podem ser alterados sem aviso prévio.

Note : Due to the continuous development of our products, specifications may be changed without notification at any time.

Rev.0-09.18



Polígono Industrial ATUSA - Agurain S/N - 01200 Salvatierra (Alava) España
 Tel.: (+34) 945 18 00 00 Fax : (+34) 945 30 01 53 e-mail: ventas@atusa.es
www.atusa.es

