


CONEXIÓN MACHO MANDRINAR EXPANDING MALE

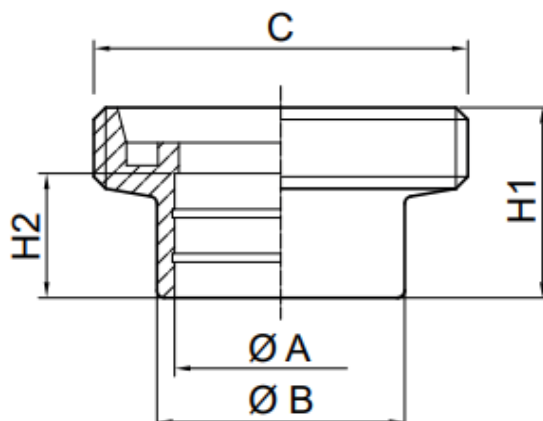

CARACTERÍSTICAS BÁSICAS

- Fabricados en acero inoxidable AISI 316L.
- Acabado: Pulido.
- Rosca de acuerdo a DIN 405.
- Terminación superficie interna $Ra \leq 0,8 \mu m$.

BASIC FEATURES

- Made of stainless steel AISI 316L.
- Ending: Polish.
- Thread according to DIN 405 standard.
- Internal surface finished $Ra \leq 0,8 \mu m$.

INFORMACIÓN TÉCNICA - TECHNICAL INFORMATION

DN	COD.	DIMENSIONES - DIMENSIONS					Peso aprox. Weight aprox. (kg)
		A (mm)	B (mm)	C (mm)	H1 (mm)	H2 (mm)	
10	I3806M02	12,2	18	Rd28x1/8"	21	12	0,037
15	I3806M03	18,2	24	Rd34x1/8"	21	12	0,050
20	I3806M04	22,2	30	Rd44x1/6"	24	12	0,100
25	I3806M05	28,2	35	Rd52x1/6"	29	15	0,130
32	I3806M06	34,2	41	Rd58x1/6"	32	18	0,162
40	I3806M07	40,2	48	Rd65x1/6"	33	20	0,210
50	I3806M08	52,2	61	Rd78x1/6"	35	22	0,303
65	I3806M09	70,3	79	Rd95x1/6"	40	25	0,446
80	I3806M0A	85,3	93	Rd110x1/4"	45	28	0,598
100	I3806M0C	104,3	114	Rd130x1/4"	54	35	0,884

Observaciones:

Dada la complejidad, variedad y gran cantidad de especificaciones particulares de cada instalación, en conjunción con la existencia de diversos factores que pueden afectar a las condiciones de trabajo y naturaleza del producto, es responsabilidad del usuario final realizar los ensayos necesarios para garantizar el correcto funcionamiento del producto en cada aplicación concreta.

La instalación del producto deberá realizarse y mantenerse siguiendo códigos de buena práctica y/o estándares existentes.

Remarks:

Due to the complexity, variety and large number of particular specifications for each installation, along with the existence of diverse factors which can affect the working conditions and nature of the product, it is the responsibility of the end-user to carry out the necessary tests to ensure the proper functioning of the product in any specific application.

Product installation must be carried out and maintained following the good practice codes and/or updated technical standards.

Nota : Debido al constante desarrollo de nuestros productos, los datos suministrados pueden ser alterados sin previo aviso.

Note : Due to the continuous development of our products, specifications may be changed without notification at any time.

Rev.0-12.22



Polígono Industrial ATUSA - Agurain S/N - 01200 Salvatierra (Alava) España
Tel.: (+34) 945 18 00 00 Fax : (+34) 945 30 01 53 e-mail: ventas@atusagroup.com
www.atusagroup.com