


TUERCA SMS SMS NUT

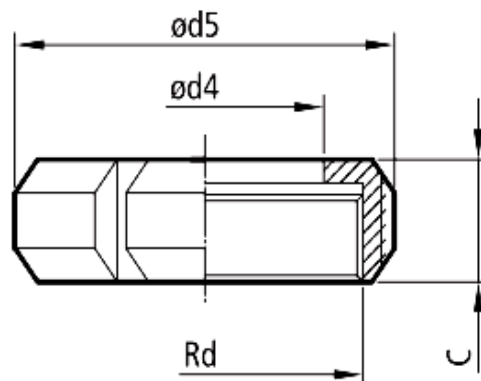

CARACTERÍSTICAS BÁSICAS

- Fabricados en acero inoxidable AISI 304.
- Según norma SMS 1146.
- Acabado: Pulido.
- Rosca de acuerdo a DIN 405.
- Terminación superficie interna $Ra \leq 0,8 \mu m$.

BASIC FEATURES

- Made of stainless steel AISI 304.
- According to SMS 1146 standard.
- Ending: Polish.
- Thread according to DIN 405 standard.
- Internal surface finished $Ra \leq 0,8 \mu m$.

INFORMACIÓN TÉCNICA - TECHNICAL INFORMATION

DN	COD.	DIMENSIONES - DIMENSIONS				Peso aprox. Weight aprox. (kg)
		Ød4 (mm)	Ød5 (mm)	Rd	C (mm)	
25	I3744S05	32	51	Rd40x1/6"	20	0,110
38	I3744S06	48	74	Rd60x1/6"	25	0,270
51	I3744S07	61	84	Rd70x1/6"	26	0,300
63,5	I3744S08	74	100	Rd85x1/6"	30	0,490
76	I3744S09	87	114	Rd98x1/6"	32	0,640
101,6	I3744S0A	117	150	Rd132x1/6"	32	0,980
104	I3744S0C	113	140	Rd125x1/4"	32	0,950

Observaciones:

Dada la complejidad, variedad y gran cantidad de especificaciones particulares de cada instalación, en conjunción con la existencia de diversos factores que pueden afectar a las condiciones de trabajo y naturaleza del producto, es responsabilidad del usuario final realizar los ensayos necesarios para garantizar el correcto funcionamiento del producto en cada aplicación concreta.

La instalación del producto deberá realizarse y mantenerse siguiendo códigos de buena práctica y/o estándares existentes.

Remarks:

Due to the complexity, variety and large number of particular specifications for each installation, along with the existence of diverse factors which can affect the working conditions and nature of the product, it is the responsibility of the end-user to carry out the necessary tests to ensure the proper functioning of the product in any specific application.

Product installation must be carried out and maintained following the good practice codes and/or updated technical standards.

Nota : Debido al constante desarrollo de nuestros productos, los datos suministrados pueden ser alterados sin previo aviso.

Note : Due to the continuous development of our products, specifications may be changed without notification at any time.

Rev.0-12.22



Polígono Industrial ATUSA - Agurain S/N - 01200 Salvatierra (Alava) España
Tel.: (+34) 945 18 00 00 Fax : (+34) 945 30 01 53 e-mail: ventas@atusagroup.com
www.atusagroup.com