


710/D

GIUNTO GIBAUT PER TUBI IN PVC GIBAUT COUPLING FOR PVC PIPES

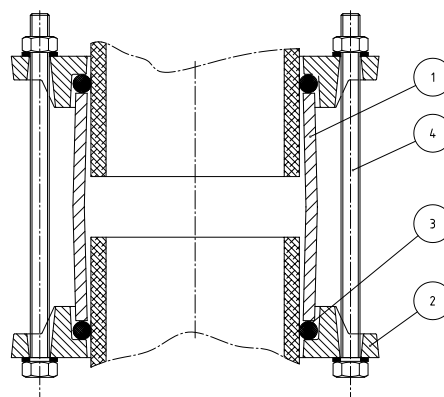

DESCRIZIONE DEI COMPONENTI - COMPONENTS DESCRIPTION

Ítem	Descrizione - Description	Materiale - Material
1	Corpo - Body	Ghisa Sferoidale - Ductile Iron GGG 50 (EN-GJS-500-7)
2	Controflangia - Flange	Ghisa Sferoidale - Ductile Iron GGG 50 (EN-GJS-500-7)
3	Guarnizione - Gasket	EPDM
4	Viti - Bolts	Acciaio Zincato - Zinc Plated Steel

CARATTERISTICHE TECNICHE

- Rivestimento interno ed esterno "EPOXY", 250 µm.
- Viteria in acciaio zincato.
- Permette di unire le tubazioni in PVC.

APPLICAZIONI GENERALI

- Per il collegamento di tubi in PVC con estremità lisce in impianti idrici generali, di ingegneria civile, idraulici o di irrigazione.

Osservazioni:

Data la complessità, la varietà e l'elevato numero di specifiche particolari di ciascuna installazione, unitamente all'esistenza di vari fattori che possono influenzare le condizioni di lavoro e la natura del prodotto, è responsabilità dell'utente finale eseguire le prove necessarie per garantire il corretto funzionamento del prodotto in ogni specifica applicazione.

L'installazione del prodotto deve essere eseguita e mantenuta secondo codici di buona pratica e/o norme vigenti.

BASIC FEATURES

- Inside and outside "EPOXY" powder coating, 250 µm.
- Steel bolts with zinc coating.
- It allows to join PVC pipes.


GENERAL APPLICATIONS

- To join PVC pipes in civil, hydraulic or irrigation water systems.

Remarks:

Due to the complexity, variety and large number of particular specifications for each installation, along with the existence of diverse factors which can affect the working conditions and nature of the product, it is the responsibility of the end-user to carry out the necessary tests to ensure the proper functioning of the product in any specific application.

Product installation must be carried out and maintained following the good practice codes and/or updated technical standards.

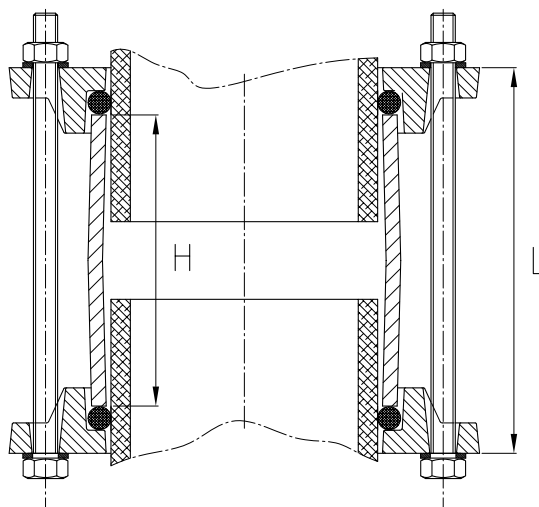
INFORMAZIONI TECNICHE - TECHNICAL INFORMATION

Ø (mm)	COD.	DIMENSIONI - DIMENSIONS				Peso appros. Weight aprox. (Kg)
		H (mm)	L (mm)	Viti/Bolt		
				Nº	Metrica Metric	
63	VF71D063	125	164	2	M12	1,8
75	VF71D075	125	164	2	M12	2,4
90	VF71D090	125	164	3	M12	2,8
110	VF71D110	145	184	3	M12	3,7
125	VF71D125	145	184	3	M12	4,2
140	VF71D140	145	184	4	M12	5,8
160	VF71D160	180	219	4	M12	6,9
180	VF71D180	180	219	4	M12	7,8
200	VF71D200	180	219	4	M12	8,6
250	VF71D250	180	220	6	M12	18,0
315	VF71D315	180	220	6	M12	22,0

Nota: A causa del costante sviluppo dei nostri prodotti, i dati forniti possono essere modificati senza preavviso.

Note : Due to the continuous development of our products, specifications may be changed without notification at any time.

Rev.1-07.24
2/2