
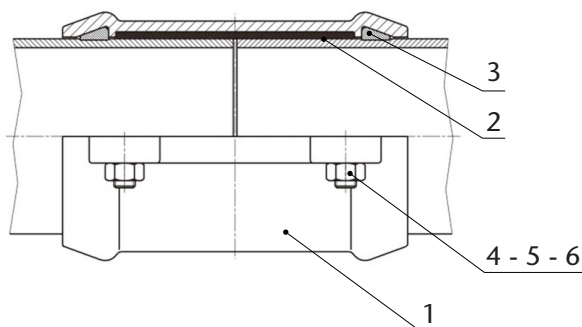


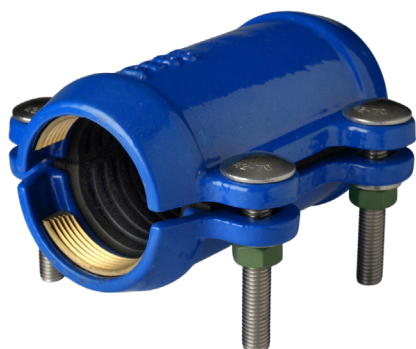

DESCRIÇÃO DOS COMPONENTES - COMPONENTS DESCRIPTION

Ítem	Descrição - Description	Material - Material
1	Corpo - Body	Fundição Nodular - Ductile Iron GGG 50 (EN-GJS-500-7)
2	Junta - Gasket	EPDM
3	Anéis - Rings	Latão - Brass
4	Parafusos - Bolts	Aço Inoxidável - Stainless Steel
5	Anilhas - Washers	Aço Inoxidável - Stainless Steel
6	Porcas - Nuts	Aço Inoxidável - Stainless Steel

CARACTERÍSTICAS BÁSICAS

- Pressão de serviço: PN 10.
- Revestimento interior e exterior "EPOXY".
- Parafusos, porcas e anilhas em aço inoxidável.

APLICAÇÕES GERAIS

- Para reparação de tubos PE em instalações gerais de água, obras civis, hidráulica ou rega.

Observações:

Dada a complexidade, variedade e grande quantidade de especificações particulares de cada instalação, em conjunção com a existência de diversos factores que podem afectar as condições de trabalho e natureza do produto, é da responsabilidade do utilizador final realizar os ensaios necessários para garantir o correcto funcionamento do produto em cada aplicação concreta.

A instalação do produto deverá ser realizada e mantida seguindo os códigos de boa prática e/ou normas existentes.

BASIC FEATURES

- Working pressure: PN 10.
- Inside and outside "EPOXY" powder coating.
- Stainless steel nuts and bolts.



GENERAL APPLICATIONS

- To fix PE pipes in civil, hydraulic or irrigation water systems.

Remarks:

Due to the complexity, variety and large number of particular specifications for each installation, along with the existence of diverse factors which can affect the working conditions and nature of the product, it is the responsibility of the end-user to carry out the necessary tests to ensure the proper functioning of the product in any specific application.

Product installation must be carried out and maintained following the good practice codes and/or updated technical standards.

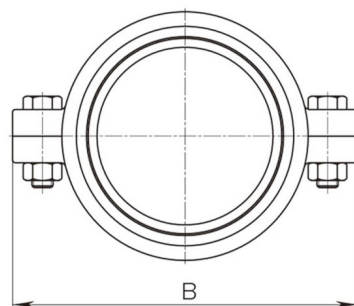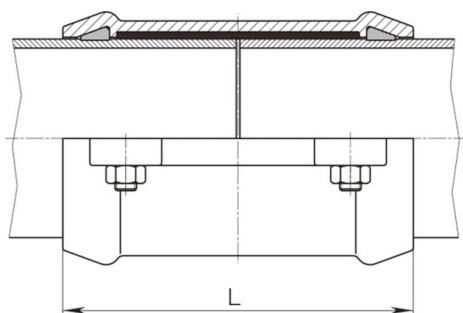
INFORMAÇÃO TÉCNICA - TECHNICAL INFORMATION

Ø (mm)	COD.	DIMENSÕES - DIMENSIONS				Peso aprox. Weight aprox. (Kg)
		B (mm)	L (mm)	Parafusos/Bolts		
				Nº	Métrica Metric	
63	VF830063	144	164	4	M12	2,6
75	VF830075	156	170	4	M12	3,2
90	VF830090	174	174	4	M12	3,8
110	VF830110	196	195	4	M12	4,3
125	VF830125	214	195	4	M12	4,8
140	VF830140	228	220	4	M12	6,9
160	VF830160	254	245	4	M12	8,6
200	VF830200	308	316	6	M16	20,2

Nota : Devido ao constante desenvolvimento dos nossos produtos, o desenho e os dados fornecidos podem ser alterados sem aviso prévio.

Note : Due to the continuous development of our products, specifications may be changed without notification at any time.

Rev.0-02.25
2/2